

Sumitomo Drive Technologies
Always on the Move

New IB Series P1 Type

Low-Backlash Planetary
Gear Reducer for Servo Motors



More Reduction Ratios! 1/3.7, 1/11, 1/81
Three-Minute Backlash Available!

Jan. 2007


Table of Contents

Features	... 2
Standard Specification, Construction, and Mechanism	... 6
Nomenclature	... 7
Selection Table 1 (Frame Size Combination Table for Each Motor Rated Speed)	... 8
Selection Table 2 (Frame Size Combination Table for Each Servo Motor Manufacturers)	... 9
1. Yaskawa Electric Corporation	... 9
2. Mitsubishi Electric Corporation	... 13
3. Matsushita Electric Industrial Co., Ltd.	... 15
4. Sanyo Denki Co., Ltd.	... 16
5. Fuji Electric FA Components & Systems	... 17
6. FANUC Ltd.	... 18
7. KEYENCE	... 19
Selection Table 3 (Rating Table) (Allowable External Rating)	... 20 ... 22
Selection Procedure	... 24
Dimension Drawings	... 26
Solid Shaft	... 26
Flange Shaft	... 53
Durability Check of Output Shaft Part	... 80
Formula for Calculation of Moment of Inertia and GD^2	... 83
Formula for Calculation of Moment of Inertia, Load Torque, and Acceleration Torque	... 84
Moment of Inertia (at Motor Shaft)	... 85
GD^2 (at Motor Shaft)	... 86
Mechanical Precision of Output Part of the Reducer	... 87
Motor Attachment Procedure	... 88
Motor Precision	... 89
Warranty and Safety Precautions	... 90

IB Series P1 Type

Low-backlash Planetary Gear Reducer for Servo Motors

IB Series P1 Type

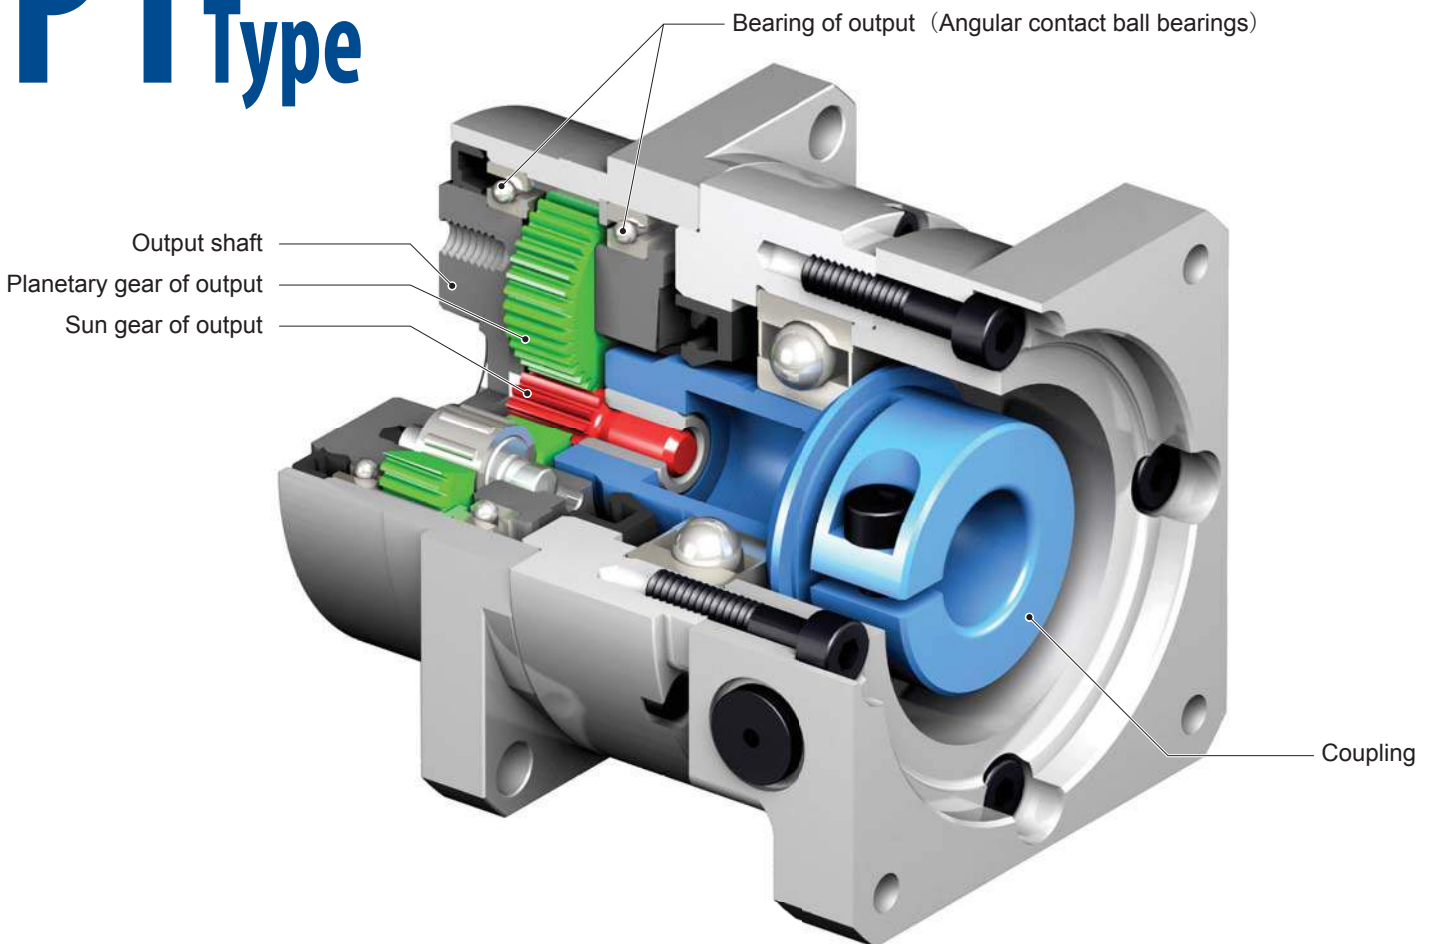

Specification

- Backlash Initial backlash setting is 3 or 15-minute
- Rated torque 10.5-101Nm
- Motor capacity 50W-5000W
- Reduction ratio 1/3.7, 1/5, 1/9, 1/11, 1/15, 1/21, 1/33, 1/45, 1/81
- Allowable maximum input speed 6000r/min
- Reduction system Planetary gear mechanism

Features

- **No.1** Compactness in the Industry
Large diameter precision angular bearing, supporting output shaft, allows large radial load with compact casing.
- Responsiveness to Newest Servo Motors for Simpler Applications!
- Short delivery response

Purpose

- Transfer robots
- Peripheral equipment for robots
- FA equipment related
- Semi-conductor production machine
- Machine tools
- Loader drive and shaft motion
- Wrapping machines
(bag making and pillow wrapping)
- Wood-working machine
- Medical equipment
- Monitoring camera
- Vending machine
- Analyzing machine
- Measuring equipment
- Laser processing machine


No. 1 Compactness in Our Industry

Significant size and mass reduction in low reduction ratio and medium capacity range.

New Release


Mass reduced to about 1/3

ANFX-P130N-1ZLD-5
Mass 8.4kg

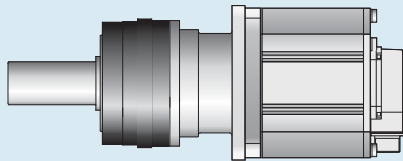

Existing Product

ANFJ-L30-SV-5
Mass 25kg

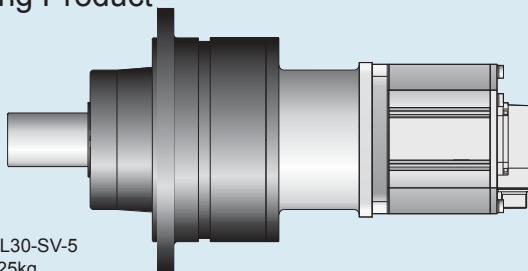


Comparison of Reduction Ratio 5 for 3500W

New Release


Mass reduced to about 1/2

ANFX-P120N-7XLD-5
Mass 2.7kg



Existing Product

ANFX-P35N-7XLC-5
Mass 6.3kg

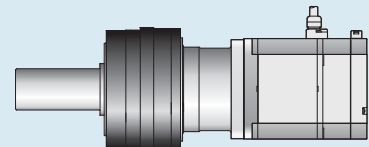

Comparison of Reduction Ratio 5 for 1500W

Output shaft Variation

Three variations available to match customers' needs. Optimal selection possible for your application.



Keyless solid shaft type




Flange shaft type



Solid shaft type with keyway

Assembly

Simple assembly. Directly connect servo motor and reducer with bolt (provided by customer) after delivery. Tighten motor shaft with hexagon wrench. Ready for immediate use.

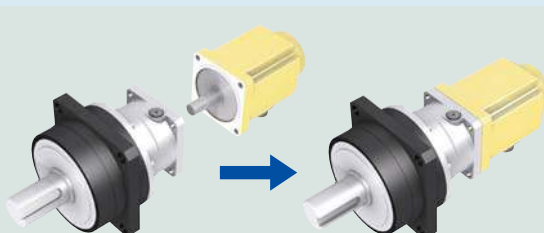




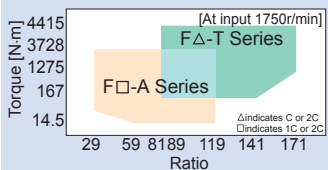
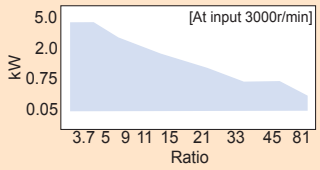
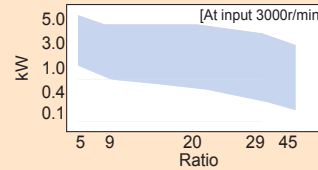
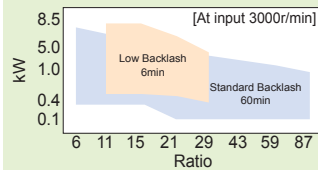
Keyless Type Servo Motor



Input Side Clamp

IB Series P1 Type

Motion Control Drives Product Lineup

CYCLOR®DRIVE F Series	Speed Reducer for Servo Motors IB Series		CYCLOR®DRIVE LB Series (Backlash) STD Series
Flat type component Lost motion 0.5-1.0 arcmin 	NEW P1 Type Backlash 3min 15min 		Backlash LB Series 6min STD Series 60min 
			
Refer to separate catalog No.F2001	This catalog		Refer to separate catalog No.C2103

IB Series Manufacture Range

Motor Rated Speed 3000 [r/min]

Servo motor Capacity [W]	Reduction Ratio								
	3.7	5	9	11	15	21	33	45	81
50									
100									
200									
300									
400									
500									
600									
750									
1000									
1200									
1500									
2000									
2500									
3000									
3500									
4000									
4500									
5000									

Reduction ratio of Ltype: 1/20 for *1 and 1/29 for *2



Motion Control Drive of Sumitomo Drive Technologies are available for various areas requiring precision control.


Application Examples

Recommended models: **F** CYCLOR DRIVE F Series
IB IB Series
SV CYCLOR DRIVE for servo motors




F
IB

Industrial Robot
Axis Driving, Robot Slider

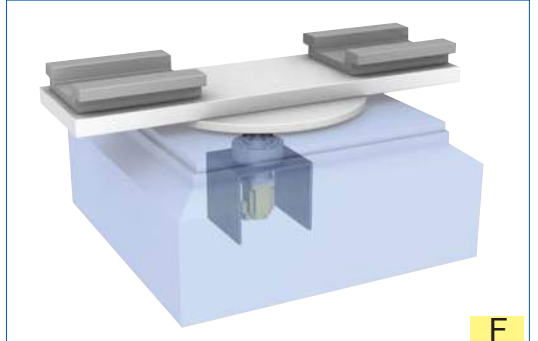


F

Machine Tool
Automatic Pallet Changer Drive

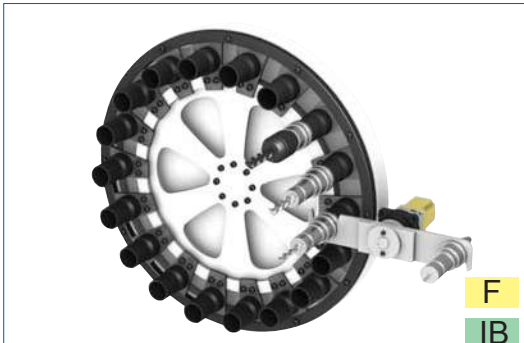

F
IB

Machine Tool Magazine Drive

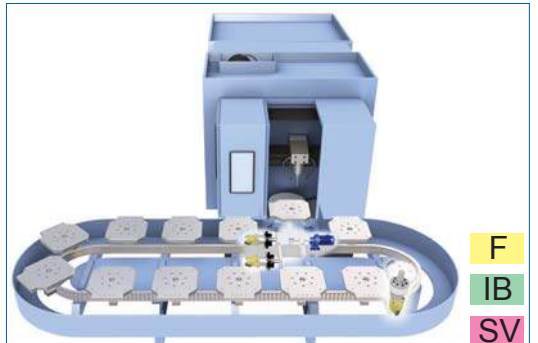


F
IB
SV

Machine Tool
Automatic Pallet Pool Drive



IB
SV

Peripheral Equipment for Machine Tool
Loader, Unloader

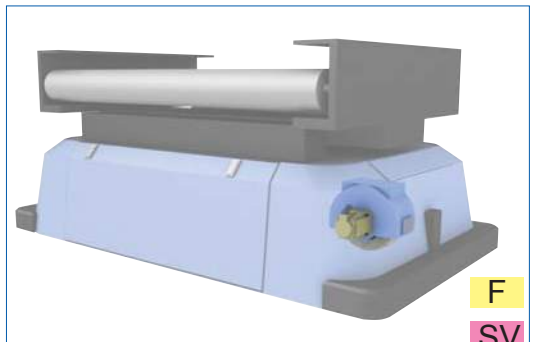

F
SV

FA Equipment (AGV Driving)



IB

Packaging Machine
(Pillow-Shape Wrapping Machine)



F
IB


Liquid Crystal Transfer Robot
Axis Driving, Robot Slider

Standard Specification, Construction, and Mechanism

Standard Specification


Backlash	Initial backlash setting is 3 or 15-minute.
Efficiency	90% or more at rated output torque (with reduction ratio 3.7, 5, 9)
Noise Level	70dB(A) 0.5m *Varies depending on models and mounting condition.
Lubrication system	Grease lubrication The unit is filled with grease at the time of shipping. It is ready for immediate use.
Reduction system	Planetary gear mechanism Single stage type (Reduction Ratio: 3.7, 5, 9) Double stage type (Reduction Ratio: 11, 15, 21, 33, 45, 81)
Output shaft rotation direction	Same direction as the rotation direction of input gear.
Material	Case with internal gear and gear: Chrome-Molybdenum Steel Joint cover, Adapter plate: Aluminum alloy Output and input shaft: S45C
Mounting location	Indoor (without dust and water)
Ambient temperature	0~40°C Consult us when the operation condition exceeds the above and when special grease is necessary such as food manufacturing machine.
Ambient humidity	85% or less. There should be no condensation.
Altitude	1000m or below
Ambient atmosphere	There should be no corrosive gases, explosive gases, vapor, or dust.
Mounting angle	All angles possible (no limitation)
Paint	Black oxide coating for housing with internal gear Output shaft comes with rustproof treatment at the time of shipping.
Actual reduction ratio	3/11 is the actual reduction ratio for 1/3.7. All of the other reduction ratios are whole numbers.
Surface temperature of the reducer	80°C or below. Consult us when operating continuously.

Construction Drawing

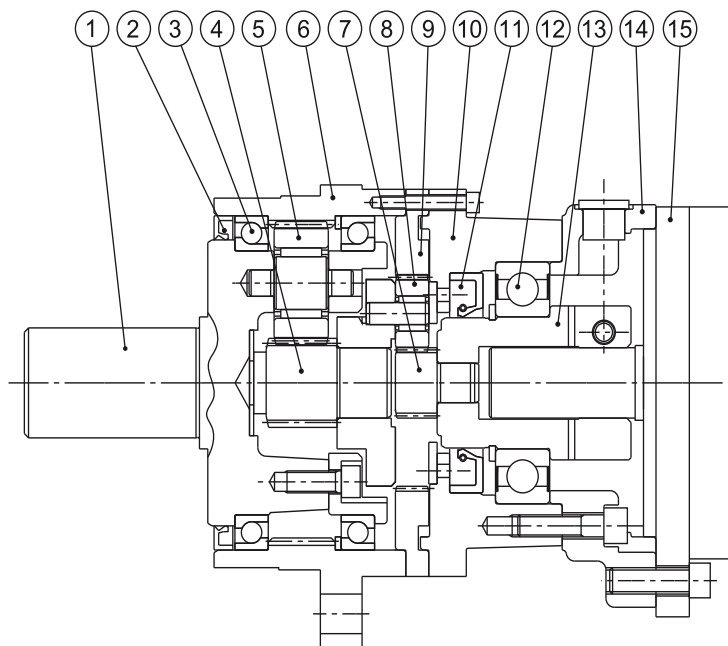




Number	Part Name
1	Output Shaft
2	Oil Seal
3	Bearing of Output
4	Sun Gear of Output
5	Planetary Gear of Output
6	Casing with Internal Gear
7	Sun Gear of Input
8	Planetary Gear of Input
9	Internal Gear of Input
10	Joint Cover
11	Input Shaft Bearing
12	Oil Seal
13	Coupling
14	Adaptor Plate
15	Motor (Provided by Customers)

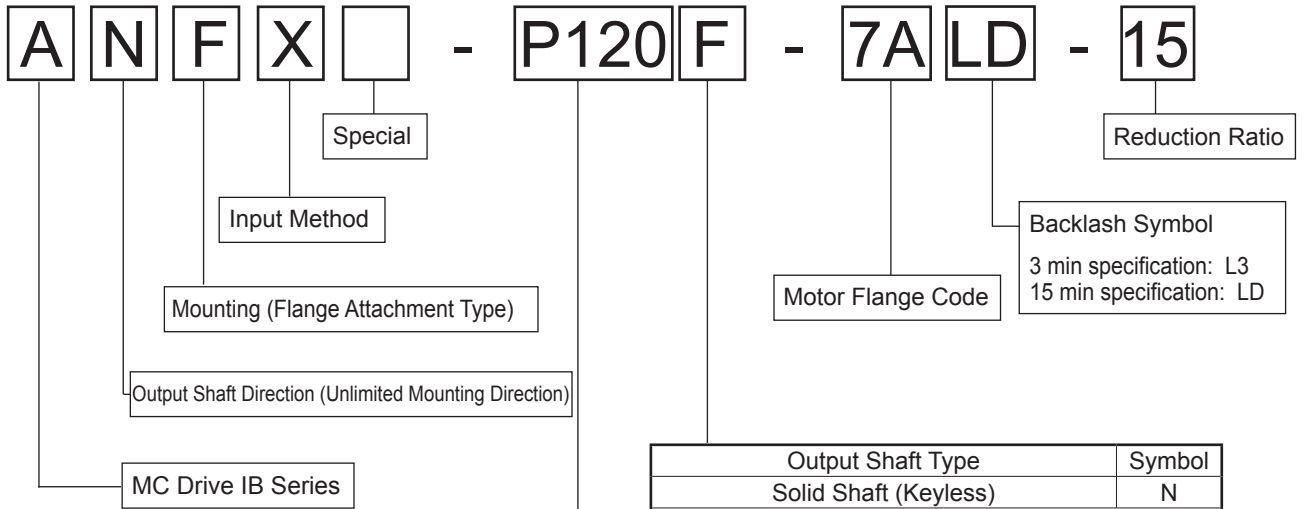Fig. 1



Type and Frame Size	
P	110
	120
	130

Output Shaft Type	Symbol
Solid Shaft (Keyless)	N
	
Solid Shaft (with Key)	W
	
Flange Shaft	F
	

Selection Table 1 (Frame Size Combination Table for Each Motor Rated Speed)

Rated Motor Speed 1000 [r/min]

Servo Moto Capacity [W]	Reduction Ratio								
	3.7 (3/11)	5	9	11	15	21	33	45	81
50								●	P120
100			P110			●	P120		P130
200									●
300				P120					
400							●	●	
500									
600				P130					
750						●			
1000									
1200		●							
1500									
2000	P130								
2500									
3000									
3500									
4000									
4500									
5000									

Rated Motor Speed 1500 [r/min]

Servo Moto Capacity [W]	Reduction Ratio								
	3.7 (3/11)	5	9	11	15	21	33	45	81
50									P120
100			P110				●	●	●
200						●			P130
300									●
400				P120				P130	
500								●	
600									
750									
1000									
1200									
1500									
2000									
2500	P130								
3000									
3500									
4000									
4500									
5000									

Rated Motor Speed 2000 [r/min]

Servo Moto Capacity [W]	Reduction Ratio								
	3.7 (3/11)	5	9	11	15	21	33	45	81
50									●
100			P110					●	P120
200						●			●
300			●				P120	●	P130
400									●
500					P120		P130		
600									
750									
1000									
1200					P130				
1500									
2000									
2500									
3000	P130								
3500									
4000									
4500									
5000									

Rated Motor Speed 3000 [r/min]

Servo Moto Capacity [W]	Reduction Ratio								
	3.7 (3/11)	5	9	11	15	21	33	45	81
50									●
100			P110						P120
200							●		●
300						●			
400									P130
500									●
600					P120		P130		
750									
1000									
1200									
1500						P130			
2000									
2500									
3000									
3500									
4000									
4500									
5000									

Rated Motor Speed 4000 [r/min]

Servo Moto Capacity [W]	Reduction Ratio								
	3.7 (3/11)	5	9	11	15	21	33	45	81
50									●
100									●
200			P110					●	●
300							●	●	●
400						●			
500									
600									
750					P120			P130	●
1000									
1200									
1500									
2000									
2500					P130				
3000									
3500									
4000									
4500									
5000									

No Load Running Torque [SI Unit]

Frame Size	Uni	Reduction Ratio								
		3.7 (3/11)	5	9	11	15	21	33	45	81
P110		0.25	0.20	0.16		0.20			0.14	
P120	N-m	0.60	0.40	0.30		0.35			0.26	
P130		1.00	0.70	0.55		0.60			0.45	

No Load Running Torque [Engineering Unit]

Frame Size	Uni	Reduction Ratio								
		3.7 (3/11)	5	9	11	15	21	33	45	81
P110		0.025	0.020	0.016		0.020			0.014	
P120	kgf-m	0.061	0.041	0.031		0.036			0.027	
P130		0.102	0.071	0.056		0.061			0.046	

*Torque necessary at the input side to rotate the reducer at no load condition.

*This is the representative value when the ambient temperature is 20°C.

*Refer to Selection Table 2 (on pages 9-18) for frame size combination for each servo motor manufacturer.

*Refer to Selection Table 3 (on pages 20, 22-23) for rated torque, allowable maximum input speed, allowable peak torque, and allowable radial load for each frame size.

*Refer to Selection Table 3 (on pages 21) for %ED of each speed.

*Refer to Selection Table 3 (on page 20) for allowable peak torque at startup for combinations marked ●.

*Note the no load running torque on this page when using combinations with [].

*Consult us when no load running torque is too large for your application. Special models for lowering no load running torque are available on request.

Selection Table 2 (Frame Size Combination Table for Each Servo Motor Manufacturers)

P1 Type

1. Yaskawa Electric Corporation

ΣV Series SGMJV Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
50	SGMJV-A5**A2*	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	2D
100	SGMJV-01**A2*	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110	P110	P120 ^Δ	2D
200	SGMJV-02**A2*	P110	P110	P110	P110	P110	P110	P110	P110●	P120	2R
400	SGMJV-04**A2*	P110	P110	P110	P120	P120	P120	P120	P120	P120	2R
750	SGMJV-08**A2*	P120	P120	P120	P120	P120	P120	P120	P130	P130	1G

ΣV Series SGMAV Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
50	SGMAV-A5**A2*	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	2D
100	SGMAV-01**A2*	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110 ^Δ	P110	P110	P120 ^Δ	2D
200	SGMAV-02**A2*	P110	P110	P110	P110	P110	P110	P110	P110●	P120	2R
400	SGMAV-04**A2*	P110	P110	P110	P120	P120	P120	P120	P120	P130	2R
550	SGMAV-06**A2*	P110	P110	P120	P120	P120	P120	P130	P130	-	2R
750	SGMAV-08**A2*	P120	P120	P120	P120	P120	P120	P130	P130	-	1G

ΣV Series SGMGV Series (Rated speed: 1500 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
450	SGMGV-05**A2*	P110	P120	P120	P120	P120	P120	P130	P130	-	8E
850	SGMGV-09**A2*	P120	P120	P130	P130	P130	P130	-	-	-	7X
1300	SGMGV-13**A2*	P120	P120	P130	-	-	-	-	-	-	1S
2000	SGMGV-20**A2*	P130	P130	-	-	-	-	-	-	-	7Z
3000	SGMGV-30**A2*	P130	P130	-	-	-	-	-	-	-	0X
4400	SGMGV-44**A2*	P130	-	-	-	-	-	-	-	-	0X

Page of Dimension Table

[Page]

Frame Size	Output Shaft Type	Reduction Ratio								
		3.7	5	9	11	15	21	33	45	81
P110	(N,W)	26	27	28	29	30	31	32	33	34
	(F)	53	54	55	56	57	58	59	60	61
P120	(N,W)	35	36	37	38	39	40	41	42	43
	(F)	62	63	64	65	66	67	68	69	70
P130	(N,W)	44	45	46	47	48	49	50	51	52
	(F)	71	72	73	74	75	76	77	78	79

Note: *Refer to Selection Table 3 (on pages 20, 22-23) for rated torque, allowable maximum input speed, allowable peak torque, and allowable radial load for each frame size.

*Check the value of no load running torque in Selection Table 1 (page 8) when using the combinations marked with Δ.

Consult us for larger no load running torque is larger. Specialized units may be available.

*Refer to Selection Table 3 (on page 20) for allowable peak torque at startup for combinations marked ●.

Selection Table 2 (Frame Size Combination Table for Each Servo Motor Manufacturers)

1. Yaskawa Electric Corporation

Σ III Series SGMAS Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
50	SGMAS-A5A**2*	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	7J
100	SGMAS-01A**2*	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110	P110	P120 Δ	2D
200	SGMAS-02A**2*	P110	P110	P110	P110	P110	P110	P110●	P120	P120●	2R
400	SGMAS-04A**2*	P110	P110	P110	P120	P120	P120	P120	P120	P130	2R
600	SGMAS-06A**2*	P110	P110	P120	P120	P120	P120	P130	P130	-	2R
750	SGMAS-08A**2*	P120	P120	P120	P120	P120	P120	P130	P130	-	7P

Σ III Series SGMPS Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
100	SGMPS-01A**2*	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110	P110	P120 Δ	2G
200	SGMPS-02A**2*	P110	P110	P110	P110	P110	P110	P110●	P120	P120●	2T
400	SGMPS-04A**2*	P110	P110	P110	P120	P120	P120	P120	P120	P130	2T
750	SGMPS-08A**2*	P120	P120	P120	P120	P120	P120	P130	P130	-	7R
1500	SGMPS-15A**2*	P120	P120	P120	P130	P130	P130	-	-	-	7X

Σ III Series SGMSS Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
1000	SGMSS-10A**2*	P120	P120	P120	P120	P120	P130	-	-	-	1L
1500	SGMSS-15A**2*	P120	P120	P120	P130	P130	P130	-	-	-	1L
2000	SGMSS-20A**2*	P120	P120	P130	P130	P130	-	-	-	-	1L
2500	SGMSS-25A**2*	P120	P120	P130	-	-	-	-	-	-	1L
3000	SGMSS-30A**2*	P130	P130	P130	-	-	-	-	-	-	1T
4000	SGMSS-40A**2*	P130	P130	-	-	-	-	-	-	-	1T
5000	SGMSS-50A**2*	P130	P130	-	-	-	-	-	-	-	1T

Page of Dimension Table

[Page]

Frame Size	Output Shaft Type	Reduction Ratio								
		3.7	5	9	11	15	21	33	45	81
P110	Solid Shaft (N, W)	26	27	28	29	30	31	32	33	34
	Flange Shaft (F)	53	54	55	56	57	58	59	60	61
P120	Solid Shaft (N, W)	35	36	37	38	39	40	41	42	43
	Flange Shaft (F)	62	63	64	65	66	67	68	69	70
P130	Solid Shaft (N, W)	44	45	46	47	48	49	50	51	52
	Flange Shaft (F)	71	72	73	74	75	76	77	78	79

Note: *Refer to Selection Table 3 (on pages 20, 22-23) for rated torque, allowable maximum input speed, allowable peak torque, and allowable radial load for each frame size.

*Check the value of no load running torque in Selection Table 1 (page 8) when using the combinations marked with Δ . Consult us for larger no load running torque is larger. Specialized units may be available.

*Refer to Selection Table 3 (on page 20) for allowable peak torque at startup for combinations marked ●.

Selection Table 2 (Frame Size Combination Table for Each Servo Motor Manufacturers)

P1 Type

Yaskawa Electric Corporation

Σ II Series SGMAH Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
50	SGMAH-A5***2*	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	7J
100	SGMAH-01***2*	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110	P110	P120 Δ	2D
200	SGMAH-02***2*	P110	P110	P110	P110	P110	P110	P110 \bullet	P120	P120 \bullet	2R
400	SGMAH-04***2*	P110	P110	P110	P120	P120	P120	P120	P120	P130	2R
750	SGMAH-08***2*	P120	P120	P120	P120	P120	P120	P130	P130	-	7P

Σ II Series SGMPH Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
100	SGMPH-01***2*	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110	P110	P120 Δ	2G
200	SGMPH-02***2*	P110	P110	P110	P110	P110	P110	P110 \bullet	P120	P120 \bullet	2T
400	SGMPH-04***2*	P110	P110	P110	P120	P120	P120	P120	P120	P130	2T
750	SGMPH-08***2*	P120	P120	P120	P120	P120	P120	P130	P130	-	7R
1500	SGMPH-15***2*	P120	P120	P120	P130	P130	P130	-	-	-	7X

Σ II Series SGMSH Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
1000	SGMSH-10***2*	P120	P120	P120	P120	P120	P130	-	-	-	1L
1500	SGMSH-15***2*	P120	P120	P120	P130	P130	P130	-	-	-	1L
2000	SGMSH-20***2*	P120	P120	P130	P130	P130	-	-	-	-	1L
3000	SGMSH-30***2*	P130	P130	P130	-	-	-	-	-	-	1T
4000	SGMSH-40***2*	P130	P130	-	-	-	-	-	-	-	1T
5000	SGMSH-50***2*	P130	P130	-	-	-	-	-	-	-	1T

Page of Dimension Table

[Page]

Frame Size	Output Shaft Type	Reduction Ratio								
		3.7	5	9	11	15	21	33	45	81
P110	Solid Shaft (N, W)	26	27	28	29	30	31	32	33	34
	Flange Shaft (F)	53	54	55	56	57	58	59	60	61
P120	Solid Shaft (N, W)	35	36	37	38	39	40	41	42	43
	Flange Shaft (F)	62	63	64	65	66	67	68	69	70
P130	Solid Shaft (N, W)	44	45	46	47	48	49	50	51	52
	Flange Shaft (F)	71	72	73	74	75	76	77	78	79

Note: *Refer to Selection Table 3 (on pages 20, 22-23) for rated torque, allowable maximum input speed, allowable peak torque, and allowable radial load for each frame size.

*Check the value of no load running torque in Selection Table 1 (page 8) when using the combinations marked with Δ .

Consult us for larger no load running torque is larger. Specialized units may be available.

*Refer to Selection Table 3 (on page 20) for allowable peak torque at startup for combinations marked \bullet .

Selection Table 2 (Frame Size Combination Table for Each Servo Motor Manufacturers)

Yaskawa Electric Corporation

ΣSeries SGM Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
50	SGM-A5***2*	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	7J
100	SGM-01***2*	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110	P110	P120 Δ	2D
200	SGM-02***2*	P110	P110	P110	P110	P110	P110	P110 \bullet	P120	P120 \bullet	2R
400	SGM-04***2*	P110	P110	P110	P120	P120	P120	P120	P120	P130	2R
750	SGM-08***2*	P120	P120	P120	P120	P120	P120	P130	P130	-	7P

ΣSeries SGMP Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
100	SGMP-01***2*	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110	P110	P120 Δ	2G
200	SGMP-02***2*	P110	P110	P110	P110	P110	P110	P110 \bullet	P120	P120 \bullet	2T
400	SGMP-04***2*	P110	P110	P110	P120	P120	P120	P120	P120	P130	2T
750	SGMP-08***2*	P120	P120	P120	P120	P120	P120	P130	P130	-	7R
1500	SGMP-15***2*	P120	P120	P120	P130	P130	P130	-	-	-	7X

ΣSeries SGMS Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
1000	SGMS-10A**2*	P120	P120	P120	P120	P120	P130	-	-	-	1L
1500	SGMS-15A**2*	P120	P120	P120	P130	P130	P130	-	-	-	1L
2000	SGMS-20A**2*	P120	P120	P130	P130	P130	-	-	-	-	1L
3000	SGMS-30A**2*	P130	P130	P130	-	-	-	-	-	-	1T
4000	SGMS-40A**2*	P130	P130	-	-	-	-	-	-	-	1T
5000	SGMS-50A**2*	P130	P130	-	-	-	-	-	-	-	1T

Page of Dimension Table

[Page]

Frame Size	Output Shaft Type	Reduction Ratio								
		3.7	5	9	11	15	21	33	45	81
P110	Solid Shaft (N, W)	26	27	28	29	30	31	32	33	34
	Flange Shaft (F)	53	54	55	56	57	58	59	60	61
P120	Solid Shaft (N, W)	35	36	37	38	39	40	41	42	43
	Flange Shaft (F)	62	63	64	65	66	67	68	69	70
P130	Solid Shaft (N, W)	44	45	46	47	48	49	50	51	52
	Flange Shaft (F)	71	72	73	74	75	76	77	78	79

Note: *Refer to Selection Table 3 (on pages 20, 22-23) for rated torque, allowable maximum input speed, allowable peak torque, and allowable radial load for each frame size.

*Check the value of no load running torque in Selection Table 1 (page 8) when using the combinations marked with Δ .

Consult us for larger no load running torque is larger. Specialized units may be available.

*Refer to Selection Table 3 (on page 20) for allowable peak torque at startup for combinations marked \bullet .

Selection Table 2 (Frame Size Combination Table for Each Servo Motor Manufacturers)

2. Mitsubishi Electric Corporation

HF-KP Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
50	HF-KP053(B)	P110	P110	P110	P110	P110	P110	P110	P110	P110●	2D
100	HF-KP13(B)	P110	P110	P110	P110	P110	P110	P110	P110	P120△	2D
200	HF-KP23(B)	P110	P110	P110	P110	P110	P110	P110●	P120	P120●	2R
400	HF-KP43(B)	P110	P110	P110	P120	P120	P120	P120	P120	P130	2R
750	HF-KP73(B)	P120	P120	P120	P120	P120	P120	P130	P130	-	1G

HF-MP Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
50	HF-MP053(B)	P110	P110	P110	P110	P110	P110	P110	P110	P110●	2D
100	HF-MP13(B)	P110	P110	P110	P110	P110	P110	P110	P110	P120△	2D
200	HF-MP23(B)	P110	P110	P110	P110	P110	P110	P110●	P120	P120●	2R
400	HF-MP43(B)	P110	P110	P110	P120	P120	P120	P120	P120	P130	2R
750	HF-MP73(B)	P120	P120	P120	P120	P120	P120	P130	P130	-	1G

HF-SP Series (Rated speed: 2000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
500	HF-SP52(B)	P120	P120	P120	P120	P120	P120	P130	P130	-	7Z
1000	HF-SP102(B)	P120	P120	P120	P130	P130	P130	-	-	-	7Z
1500	HF-SP152(B)	P120	P120	P130	P130	P130	-	-	-	-	7Z
2000	HF-SP202(B)	P130	P130	P130	-	-	-	-	-	-	0X
3500	HF-SP352(B)	P130	P130	-	-	-	-	-	-	-	0X
5000	HF-SP502(B)	-	-	-	-	-	-	-	-	-	

HF-KFS Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
50	HC-KFS053(B)	P110△	P110△	P110△	P110△	P110△	P110△	P110△	P110△	P110●	2D
100	HC-KFS13(B)	P110△	P110△	P110△	P110△	P110△	P110△	P110	P110	P120△	2D
200	HC-KFS23(B)	P110	P110	P110	P110	P110	P110	P110●	P120	P120●	2R
400	HC-KFS43(B)	P110	P110	P110	P120	P120	P120	P120	P120	P130	2R
750	HC-KFS73(B)	P120	P120	P120	P120	P120	P120	P130	P130	-	1G

Page of Dimension Table

[Page]

Frame Size	Output Shaft Type	Reduction Ratio								
		3.7	5	9	11	15	21	33	45	81
P110	Solid Shaft (N, W)	26	27	28	29	30	31	32	33	34
	Flange Shaft (F)	53	54	55	56	57	58	59	60	61
P120	Solid Shaft (N, W)	35	36	37	38	39	40	41	42	43
	Flange Shaft (F)	62	63	64	65	66	67	68	69	70
P130	Solid Shaft (N, W)	44	45	46	47	48	49	50	51	52
	Flange Shaft (F)	71	72	73	74	75	76	77	78	79

Note: *Refer to Selection Table 3 (on pages 20, 22-23) for rated torque, allowable maximum input speed, allowable peak torque, and allowable radial load for each frame size.

*Check the value of no load running torque in Selection Table 1 (page 8) when using the combinations marked with △. Consult us for larger no load running torque is larger. Specialized units may be available.

*Refer to Selection Table 3 (on page 20) for allowable peak torque at startup for combinations marked ●.

Selection Table 2 (Frame Size Combination Table for Each Servo Motor Manufacturers)

Mitsubishi Electric Corporation

HC-MFS Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
50	HC-MFS053(B)	P110 [△]	P110 [△]	P110 [△]	P110 [△]	P110 [△]	P110 [△]	P110 [△]	P110 [△]	P110 [*]	2D
100	HC-MFS13(B)	P110 [△]	P110 [△]	P110 [△]	P110 [△]	P110 [△]	P110 [△]	P110	P110	P120 [△]	2D
200	HC-MFS23(B)	P110	P110	P110	P110	P110	P110	P110 [*]	P120	P120 [*]	2R
400	HC-MFS43(B)	P110	P110	P110	P120	P120	P120	P120	P120	P130	2R
750	HC-MFS73(B)	P120	P120	P120	P120	P120	P120	P130	P130	-	1G

HC-SFS Series (Rated speed: 2000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
500	HC-SFS52(B)	P120	P120	P120	P120	P120	P120	P130	P130	-	7Z
1000	HC-SFS102(B)	P120	P120	P120	P130	P130	P130	-	-	-	7Z
1500	HC-SFS152(B)	P120	P120	P130	P130	P130	-	-	-	-	7Z
2000	HC-SFS202(B)	P130	P130	P130	-	-	-	-	-	-	0X
3500	HC-SFS352(B)	P130	P130	-	-	-	-	-	-	-	0X
5000	HC-SFS502(B)	-	-	-	-	-	-	-	-	-	

HC-UFS Series (Rated speed: 2000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
100	HC-UFS13(B)	P110 [△]	P110 [△]	P110 [△]	P110 [△]	P110 [△]	P110 [△]	P110	P110	P120 [△]	2G
200	HC-UFS23(B)	P110	P110	P110	P110	P110	P110	P110 [*]	P120	P120 [*]	2T
400	HC-UFS43(B)	P110	P110	P110	P120	P120	P120	P120	P120	P130	2T
750	HC-UFS73(B)	P120	P120	P120	P120	P120	P120	P130	P130	-	7X

Page of Dimension Table

[Page]

Frame Size	Output Shaft Type	Reduction Ratio								
		3.7	5	9	11	15	21	33	45	81
P110	Solid Shaft (N, W)	26	27	28	29	30	31	32	33	34
	Flange Shaft (F)	53	54	55	56	57	58	59	60	61
P120	Solid Shaft (N, W)	35	36	37	38	39	40	41	42	43
	Flange Shaft (F)	62	63	64	65	66	67	68	69	70
P130	Solid Shaft (N, W)	44	45	46	47	48	49	50	51	52
	Flange Shaft (F)	71	72	73	74	75	76	77	78	79

Note: *Refer to Selection Table 3 (on pages 20, 22-23) for rated torque, allowable maximum input speed, allowable peak torque, and allowable radial load for each frame size.

*Check the value of no load running torque in Selection Table 1 (page 8) when using the combinations marked with [△]. Consult us for larger no load running torque is larger. Specialized units may be available.

*Refer to Selection Table 3 (on page 20) for allowable peak torque at startup for combinations marked ●.

Selection Table 2 (Frame Size Combination Table for Each Servo Motor Manufacturers)

3. Matsushita Electric Industrial Co., Ltd.

MSMA Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
50	MSMA5A**1A	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	2C
100	MSMA01**1A	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110	P110	P120 Δ	2C
200	MSMA02**1A	P110	P110	P110	P110	P110	P110	P110 \bullet	P120	P120 \bullet	2L
400	MSMA04**1A	P110	P110	P110	P120	P120	P120	P120	P120	P130	2P
750	MSMA08**1A	P120	P120	P120	P120	P120	P120	P130	P130	-	7S
1000	MSMA10**1A	P120	P120	P120	P120	P120	P130	-	-	-	7V
1500	MSMA15**1A	P120	P120	P120	P130	P130	P130	-	-	-	7B
2000	MSMA20**1A	P120	P120	P130	P130	P130	-	-	-	-	7B
2500	MSMA25**1A	P120	P120	P130	-	-	-	-	-	-	7B
3000	MSMA30**1A	P130	P130	P130	-	-	-	-	-	-	1S
3500	MSMA35**1A	P130	P130	P130	-	-	-	-	-	-	1S
4000	MSMA40**1A	P130	P130	-	-	-	-	-	-	-	7Z
4500	MSMA45**1A	P130	P130	-	-	-	-	-	-	-	7Z
5000	MSMA50**1A	P130	P130	-	-	-	-	-	-	-	7Z

MQMA Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
100	MQMA022A1A	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110	P110	P120 Δ	2F
200	MQMA032A1A	P110	P110	P110	P110	P110	P110	P110 \bullet	P120	P120 \bullet	8A
400	MQMA042A1A	P110	P110	P110	P120	P120	P120	P120	P120	P130	8B

Page of Dimension Table

[Page]

Frame Size	Output Shaft Type	Reduction Ratio								
		3.7	5	9	11	15	21	33	45	81
P110	Solid Shaft (N, W)	26	27	28	29	30	31	32	33	34
	Flange Shaft (F)	53	54	55	56	57	58	59	60	61
P120	Solid Shaft (N, W)	35	36	37	38	39	40	41	42	43
	Flange Shaft (F)	62	63	64	65	66	67	68	69	70
P130	Solid Shaft (N, W)	44	45	46	47	48	49	50	51	52
	Flange Shaft (F)	71	72	73	74	75	76	77	78	79

Note: *Refer to Selection Table 3 (on pages 20, 22-23) for rated torque, allowable maximum input speed, allowable peak torque, and allowable radial load for each frame size.

*Check the value of no load running torque in Selection Table 1 (page 8) when using the combinations marked with Δ . Consult us for larger no load running torque is larger. Specialized units may be available.

*Refer to Selection Table 3 (on page 20) for allowable peak torque at startup for combinations marked \bullet .

Selection Table 2 (Frame Size Combination Table for Each Servo Motor Manufacturers)

4. Sanyo Denki Co., Ltd.

P3 Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
50	P30B04005H***	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	2D
100	P30B04010H***	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110	P110	P120 Δ	2D
200	P30B06020H***	P110	P110	P110	P110	P110	P110	P110 \bullet	P120	P120 \bullet	2R
400	P30B06040H***	P110	P110	P110	P120	P120	P120	P120	P120	P130	2R
750	P30B08075H***	P120	P120	P120	P120	P120	P120	P130	P130	-	7P

P5 Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
50	P50B05005H***	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	2E
100	P50B05010H***	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110	P110	P120 Δ	2E
200	P50B05020H***	P110	P110	P110	P110	P110	P110	P110 \bullet	P120	P120 \bullet	2K
	P50B07020H***	P110	P110	P110	P110	P110	P110	P110 \bullet	P120	P130	8B
300	P50B07030H***	P110	P110	P110	P110	P110	P120	P120	P120	P130	8B
400	P50B07040H***	P110	P110	P110	P120	P120	P120	P120	P120	P130	8B
500	P50B08050H***	P110	P110	P120	P120	P120	P120	P130	P130	-	8E
750	P50B08075H***	P120	P120	P120	P120	P120	P120	P130	P130	-	8E
1000	P50B08100H***	P120	P120	P120	P120	P120	P130	-	-	-	8E

Q1 Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
50	Q1AA04005***	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	2D
100	Q1AA04010***	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110	P110	P120 Δ	2D
200	Q1AA06020***	P110	P110	P110	P110	P110	P110	P110 \bullet	P120	P120 \bullet	2R
400	Q1AA06040***	P110	P110	P110	P120	P120	P120	P120	P120	P130	2R
750	Q1AA07075***	P120	P120	P120	P120	P120	P120	P130	P130	-	0U
1000	Q1AA10100***	P120	P120	P120	P120	P120	P130	-	-	-	0W
	Q1AA12100***	P120	P120	P120	P120	P120	P130	-	-	-	0Y
1500	Q1AA10150***	P120	P120	P120	P130	P130	P130	-	-	-	0W
2000	Q1AA10200***	P120	P120	P130	P130	P130	-	-	-	-	0W
	Q1AA12200***	P120	P120	P130	P130	P130	-	-	-	-	0Y
2500	Q1AA10250***	P120	P120	P130	-	-	-	-	-	-	0W
3000	Q1AA12300***	P130	P130	P130	-	-	-	-	-	-	1T
	Q1AA13300***	P130	P130	P130	-	-	-	-	-	-	1T
4000	Q1AA13400***	P130	P130	-	-	-	-	-	-	-	1T
5000	Q1AA13500***	P130	P130	-	-	-	-	-	-	-	1T

Page of Dimension Table

[Page]

Frame Size	Output Shaft Type	Reduction Ratio								
		3.7	5	9	11	15	21	33	45	81
P110	Solid Shaft (N, W)	26	27	28	29	30	31	32	33	34
	Flange Shaft (F)	53	54	55	56	57	58	59	60	61
P120	Solid Shaft (N, W)	35	36	37	38	39	40	41	42	43
	Flange Shaft (F)	62	63	64	65	66	67	68	69	70
P130	Solid Shaft (N, W)	44	45	46	47	48	49	50	51	52
	Flange Shaft (F)	71	72	73	74	75	76	77	78	79

Note: *Refer to Selection Table 3 (on pages 20, 22-23) for rated torque, allowable maximum input speed, allowable peak torque, and allowable radial load for each frame size.

*Check the value of no load running torque in Selection Table 1 (page 8) when using the combinations marked with Δ . Consult us for larger no load running torque is larger. Specialized units may be available.

*Refer to Selection Table 3 (on page 20) for allowable peak torque at startup for combinations marked \bullet .

Selection Table 2 (Frame Size Combination Table for Each Servo Motor Manufacturers)

5. Fuji Electric FA Components & Systems

GYS Motor (Rated speed: 3000 r/min)

FALDIC- α , β Series Cubic Type
 FALDIC-W Low Inertia Series

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
50	GYS500DC*-**B-*	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	7J
100	GYS101DC*-**B-*	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110	P110	P120 Δ	2D
200	GYS201DC*-**B-*	P110	P110	P110	P110	P110	P110	P110 \bullet	P120	P120 \bullet	2R
400	GYS401DC*-**B-*	P110	P110	P110	P120	P120	P120	P120	P120	P130	2R
750	GYS751DC*-**B-*	P120	P120	P120	P120	P120	P120	P130	P130	-	7P
1000	GYS102DC*-**B-*	P120	P120	P120	P120	P120	P130	-	-	-	7Y
1500	GYS152DC*-**B-*	P120	P120	P120	P130	P130	P130	-	-	-	7Y
2000	GYS202DC*-**B-*	P120	P120	P130	P130	P130	-	-	-	-	7Y
3000	GYS302DC*-**B-*	P130	P130	P130	-	-	-	-	-	-	1T
4000	GYS402DC*-**B-*	P130	P130	-	-	-	-	-	-	-	1T
5000	GYS502DC*-**B-*	P130	P130	-	-	-	-	-	-	-	1T

GYS Motor (Rated speed: 3000 r/min)

FALDIC- α , β Series Slim Type

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
100	GYC101DC*-**B-*	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110	P110	P120 Δ	2G
200	GYC201DC*-**B-*	P110	P110	P110	P110	P110	P110	P110 \bullet	P120	P120 \bullet	2T
400	GYC401DC*-**B-*	P110	P110	P110	P120	P120	P120	P120	P120	P130	2T
750	GYC751DC*-**B-*	P120	P120	P120	P120	P120	P120	P130	P130	-	7A
1000	GYC102DC*-**B-*	P120	P120	P120	P120	P120	P130	-	-	-	7Z
1500	GYC152DC*-**B-*	P120	P120	P120	P130	P130	P130	-	-	-	7Z
2000	GYC202DC*-**B-*	P120	P120	P130	P130	P130	-	-	-	-	7Z

Page of Dimension Table

[Page]

Frame Size	Output Shaft Type	Reduction Ratio								
		3.7	5	9	11	15	21	33	45	81
P110	Solid Shaft (N, W)	26	27	28	29	30	31	32	33	34
	Flange Shaft (F)	53	54	55	56	57	58	59	60	61
P120	Solid Shaft (N, W)	35	36	37	38	39	40	41	42	43
	Flange Shaft (F)	62	63	64	65	66	67	68	69	70
P130	Solid Shaft (N, W)	44	45	46	47	48	49	50	51	52
	Flange Shaft (F)	71	72	73	74	75	76	77	78	79

Note: *Refer to Selection Table 3 (on pages 20, 22-23) for rated torque, allowable maximum input speed, allowable peak torque, and allowable radial load for each frame size.

*Check the value of no load running torque in Selection Table 1 (page 8) when using the combinations marked with Δ . Consult us for larger no load running torque is larger. Specialized units may be available.

*Refer to Selection Table 3 (on page 20) for allowable peak torque at startup for combinations marked \bullet .

Selection Table 2 (Frame Size Combination Table for Each Servo Motor Manufacturers)

6. FANUC Ltd.

β is Series (Rated speed: 4000-2000 r/min) Applies to rated speed torque.

Servo motor Capacity [W]	Nomenclature of Servo Motor () indicates reted spped	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
50	β 0.2/5000is (4000)	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	2D
100	β 0.3/5000is (4000)	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	2D
130	β 0.4/5000is (4000)	P110	P110	P110	P110	P110	P110	P110	P110	P110	2H
200	β 0.5/5000is (4000)	P110	P110	P110	P110	P110	P110	P110	P110	P110	2H
400	β 1/5000is (4000)	P110	P110	P110	P120	P120	P120	P120	P120	P120	2R
500	β 2/4000is (4000)	P110	P110	P120	P120	P120	P120	P120	P120	P120	2J
750	β 4/4000is (3000)	P120	P120	P120	P120	P120	P120	P130	-	-	0V
1200	β 8/3000is (2000)	P120	P120	P130	P130	P130	P130	-	-	-	7X
1800	β 12/3000is (2000)	P120	P120	P130	P130	P130	-	-	-	-	7Z
2500	β 22/2000is (2000)	P130	P130	-	-	-	-	-	-	-	0X

α is Series (Rated speed: 4000-2000 r/min)

Servo motor Capacity [W]	Nomenclature of Servo Motor () indicates reted spped	Reduction Ratio									Motor Flange Code
		3.7	5	9	11	15	21	33	45	81	
750	α 2/5000is (4000)	P110	P110	P120	P120	P120	P120	P130	P130	P130	2J
1000	α 4/5000is (4000)	P120	P120	P120	P120	P120	P120	P130	P130	-	0V
2500	α 8/4000is (4000)	P120	P120	P130	-	-	-	-	-	-	7X
2700	α 12/4000is (3000)	P130	P130	-	-	-	-	-	-	-	7Z
4500	α 22/4000is (3000)	P130	P130	-	-	-	-	-	-	-	0X
5500	α 30/4000is (3000)	-	-	-	-	-	-	-	-	-	0X
5500	α 40/4000is (3000)	-	-	-	-	-	-	-	-	-	0X
5000	α 50/3000is (2000)	-	-	-	-	-	-	-	-	-	0X

Page of Dimension Table

[Page]

Frame Size	Output Shaft Type	Reduction Ratio								
		3.7	5	9	11	15	21	33	45	81
P110	Solid Shaft (N, W)	26	27	28	29	30	31	32	33	34
	Flange Shaft (F)	53	54	55	56	57	58	59	60	61
P120	Solid Shaft (N, W)	35	36	37	38	39	40	41	42	43
	Flange Shaft (F)	62	63	64	65	66	67	68	69	70
P130	Solid Shaft (N, W)	44	45	46	47	48	49	50	51	52
	Flange Shaft (F)	71	72	73	74	75	76	77	78	79

Note: *Refer to Selection Table 3 (on pages 20, 22-23) for rated torque, allowable maximum input speed, allowable peak torque, and allowable radial load for each frame size.

*Check the value of no load running torque in Selection Table 1 (page 8) when using the combinations marked with Δ . Consult us for larger no load running torque is larger. Specialized units may be available.

*Refer to Selection Table 3 (on page 20) for allowable peak torque at startup for combinations marked \bullet .

Selection Table 2 (Frame Size Combination Table for Each Servo Motor Manufacturers)

7. KEYENCE

MV Series (Rated speed: 3000 r/min)

Servo Motor Capacity [W]	Nomenclature of Servo Motor	Reduction Ratio									Motor Flange Code	
		3.7	5	9	11	15	21	33	45	81		
50	MV-M05(MV-B05)	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	2D
100	MV-M10(MV-B10)	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110 Δ	P110	P110	P120 Δ	2D
200	MV-M20(MV-B20)	P110	P110	P110	P110	P110	P110	P110	P110 \bullet	P120	P120 \bullet	2R
400	MV-M40(MV-B40)	P110	P110	P110	P120	P120	P120	P120	P120	P120	P130	2R
750	MV-M75(MV-B75)	P120	P120	P120	P120	P120	P120	P120	P130	P130	-	0U

Note: *Refer to Selection Table 3 (on pages 20, 22-23) for rated torque, allowable maximum input speed, allowable peak torque, and allowable radial load for each frame size.

*Check the value of no load running torque in Selection Table 1 (page 8) when using the combinations marked with Δ . Consult us for larger no load running torque is larger. Specialized units may be available.

*Refer to Selection Table 3 (on page 20) for allowable peak torque at startup for combinations marked \bullet .

Selection Table 3 (Rating Table)

Table1-1 Rating Table (SI Unit)

Input Speed (r/min)		6000	5000	4000	3000	2000	1500	1000	Allowable Peak Torque at Startup and Stop ^{*2,*6}	Maximum Torque at Emergency ^{*3,*6}	Allowable Maximum Input Speed ^{*4}	
Frame Size	Reduction Ratio	Rated Torque ^{*1}								Nm	Nm	r/min
		Nm										
P110	3.7(3/11)	8.0	8.5	9.0	10.0	11.0	12.0	13.5	40.0	60.0	6000	
	5	8.5	9.0	9.5	10.5	12.0	13.0	14.5	45.0			
	9	9.5	10.0	10.5	11.5	11.5	11.5	11.5	35.0			
	11	12.5	13.0	14.0	15.5	17.5	18.0	18.5	45.0			
	15	12.5	13.5	14.0	15.5	17.5	19.0	21.5				
	21	14.0	15.0	16.0	17.5	19.5	21.5	22.5				
	33	18.0	18.0	18.0	18.5	18.5	18.5	18.5				
	45	18.0	19.0	20.0	22.0	22.5	22.5	22.5	35.0			
81	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5				
P120	3.7(3/11)	34.0	36.0	38.5	42.0	47.5	52.0	58.5	140.0	175.0	6000	
	5	36.0	38.0	41.0	44.5	50.5	55.0	62.0	145.0	240.0		
	9	41.0	43.0	43.0	43.0	43.5	43.5	43.5	140.0	200.0		
	11	27.5	29.0	31.0	34.0	38.5	42.0	47.5	135.0	180.0		
	15	37.5	40.0	42.5	46.5	52.5	57.5	64.5	185.0	250.0		
	21	40.0	42.5	45.5	49.5	56.0	61.0	69.0	190.0			
	33	34.5	36.5	39.0	40.5	40.5	40.5	40.5	135.0	180.0		
	45	47.0	49.5	53.0	55.0	55.0	55.0	55.5	180.0	250.0		
81	43.5	43.5	43.5	43.5	43.5	43.5	43.5	140.0	200.0			
P130	3.7(3/11)	-	70.0	75.0	82.0	92.5	101.0	114.0	290.0	445.0	5000	
	5		74.0	79.5	86.5	97.5	106.5	120.5	325.0	500.0		
	9		83.5	89.5	97.5	100.0	100.0	100.5	330.0			
	11		56.5	60.5	66.0	74.5	81.0	92.0	320.0	395.0		
	15		77.0	82.5	90.0	101.5	111.0	125.0	380.0	500.0		
	21		82.0	88.0	96.0	105.5	118.0	133.5				
	33		70.5	75.5	82.0	93.0	101.0	114.5	355.0	395.0		
	45		96.0	103.0	112.0	126.5	138.0	153.0	380.0	500.0		
81	100.5	100.5	101.0	101.0	101.0	101.0	330.0					

Table 1-2 Rating Table (Engineering Unit)

Input Speed (r/min)		6000	5000	4000	3000	2000	1500	1000	Allowable Peak Torque at Startup and Stop ^{*2,*6}	Maximum Torque at Emergency ^{*3,*6}	Allowable Maximum Input Speed ^{*4}	
Frame Size	Reduction Ratio	Rated Torque ^{*1}								kgf-m	kgf-m	rpm
		kgf-m										
P110	3.7	0.82	0.87	0.92	1.02	1.12	1.22	1.38	4.08	6.12	6000	
	5	0.87	0.92	0.97	1.07	1.22	1.33	1.48	4.59			
	9	0.97	1.02	1.07	1.17	1.17	1.17	1.17	3.57			
	11	1.27	1.33	1.43	1.58	1.78	1.83	1.89	4.59			
	15	1.27	1.38	1.43	1.58	1.78	1.94	2.19				
	21	1.43	1.53	1.63	1.78	1.99	2.19	2.29				
	33	1.83	1.83	1.83	1.89	1.89	1.89	1.89				
	45	1.83	1.94	2.04	2.24	2.29	2.29	2.29	3.57			
81	1.17	1.17	1.17	1.17	1.17	1.17	1.17	1.17				
P120	3.7	3.47	3.67	3.92	4.28	4.84	5.30	5.96	14.3	17.8	6000	
	5	3.67	3.87	4.18	4.54	5.15	5.61	6.32	14.8	24.5		
	9	4.18	4.38	4.38	4.38	4.43	4.43	4.43	14.3	20.4		
	11	2.80	2.96	3.16	3.47	3.92	4.28	4.84	13.8	18.3		
	15	3.82	4.08	4.33	4.74	5.35	5.86	6.57	18.9	25.5		
	21	4.08	4.33	4.64	5.05	5.71	6.22	7.03	19.4	25.5		
	33	3.52	3.72	3.98	4.13	4.13	4.13	4.13	13.8	18.3		
	45	4.79	5.05	5.40	5.61	5.61	5.61	5.66	18.3	25.5		
81	4.43	4.43	4.43	4.43	4.43	4.43	4.43	14.3	20.4			
P130	3.7	-	7.14	7.65	8.36	9.43	10.30	11.6	29.6	45.4	5000	
	5		7.54	8.10	8.82	9.94	10.86	12.3	33.1	51.0		
	9		8.51	9.12	9.94	10.2	10.2	10.2	33.6			
	11		5.76	6.17	6.73	7.59	8.26	9.38	32.6	40.3		
	15		7.85	8.41	9.17	10.35	11.3	12.7	38.7	51.0		
	21		8.36	8.97	9.79	10.75	12.0	13.6				
	33		7.19	7.70	8.36	9.48	10.3	11.7	36.2	40.3		
	45		9.79	10.5	11.4	12.9	14.1	15.6	38.7	51.0		
81	10.2	10.2	10.3	10.3	10.3	10.3	33.6					

Selection Table 3 (Rating Table)

Table1-3 Allowable Operation Cycle

Input Speed (r/min)		6000		5000		4000		3000		2000		1500		1000	
Frame Size	Reduction Ratio	Allowable continuous operation period	Allowable % ED	Allowable continuous operation period	Allowable % ED	Allowable continuous operation period	Allowable % ED	Allowable continuous operation period	Allowable % ED	Allowable continuous operation period	Allowable % ED	Allowable continuous operation period	Allowable % ED	Allowable continuous operation period	Allowable % ED
		min	%	min	%	min	%	min	%	min	%	min	%	min	%
P110	3.7(3/11)	5	30	10	50	10	60	20	70	20	80	30	90	30	90
	5		40		60		70		80		90				
	9		50		70		80		90						
	11		40		60		70		80		90				
	15														
	21		50		70		80		90						
	33														
	45														
	81														
P120	3.7(3/11)	5	20	10	20	10	30	20	40	20	60	30	70	30	90
	5		30		50		60		70		80				
	9		40		60		70		80						
	11		30		50		60		70		80				
	15														
	21		40		60		70		80		90				
	33														
	45														
	81														
P130	3.7(3/11)	-	-	5	20	5	30	10	40	15	60	20	70	30	80
	5			30	50	60	70	80							
	9			40	60	70	80								
	11			30	50	60	70	80							
	15														
	21			40	60	70	80	90							
	33														
	45														
	81														

P1 Type

- *1: Rated torque is the allowable value of the average load torque at the output shaft. The rated torque for the input speed of 1000 r/min or less is the same as the rated torque of 1000 r/min.
- *2: Maximum allowable torque when startup and stop during operation cycle.
- *3: Maximum allowable value of the shock torque at emergency stop or external shock torque. Should be less than 1,000 times in one lifetime.
- *4: Maximum allowable input speed when not under constant operation condition.
- *5: Allowable constant operation hours for intermittent operation condition (Consult us when exceeding or when continuously operating).
- *6: Some values are not allowable depending on the input shaft diameter.
Make sure to follow the method of motor attachment in page 88.

Selection Table 3 (Allowable External Rating)

Table 2-1 External Load (SI Unit)

Motor Speed (r/min)		6000		5000		4000		3000		2000		1500		1000		Allowable Moment Nm
Frame Size	Reduction Ratio	Radial Load *1	Axial Load *2	Radial Load *1	Axial Load *2	Radial Load *1	Axial Load *2	Radial Load *1	Axial Load *2	Radial Load *1	Axial Load *2	Radial Load *1	Axial Load *2	Radial Load *1	Axial Load *2	
		N	N	N	N	N	N	N	N	N	N	N	N	N	N	
P110	3.7(3/11)	215	425	230	450	250	485	275	535	315	610	345	670	395	770	70
	5	240	470	255	500	275	540	305	595	350	680	385	750	440	860	
	9	295	575	315	610	335	655	370	725	425	830	470	910	535	1045	
	11	310	615	330	650	355	700	395	775	450	885	495	975	570	1115	
	15	350	680	370	725	400	780	440	860	505	985	555	1080	635	1240	
	21	390	760	415	810	450	870	495	960	565	1100	620	1210	715	1385	
	33	455	885	485	940	520	1015	575	1115	655	1280	725	1405	830	1610	
	45	505	985	535	1045	580	1125	635	1240	730	1420	805	1560	920	1785	
81	615	1190	655	1265	705	1360	775	1500	890	1715	980	1885	1050	2160		
P120	3.7(3/11)	670	1245	710	1320	765	1425	845	1570	965	1795	1065	1975	1215	2260	300
	5	745	1385	790	1475	855	1590	940	1750	1075	2000	1185	2205	1355	2525	
	9	905	1690	965	1795	1040	1935	1145	2130	1310	2435	1440	2680	1650	3070	
	11	965	1800	1025	1915	1105	2060	1220	2270	1395	2595	1535	2860	1760	3270	
	15	1075	2000	1145	2130	1230	2295	1355	2525	1550	2890	1710	3180	1955	3640	
	21	1205	2240	1280	2380	1380	2565	1515	2825	1735	3235	1910	3560	2190	4075	
	33	1400	2605	1485	2770	1600	2985	1765	3285	2020	3760	2225	4140	2545	4735	
	45	1550	2890	1650	3070	1775	3305	1955	3640	2240	4170	2465	4585	2825	4800	
81	1890	3515	2005	3735	2165	4025	2380	4430	2725	4800	2900	4800	2900	4800		
P130	3.7(3/11)	-	-	955	2015	1030	2170	1135	2390	1295	2735	1430	3010	1635	3445	620
	5	-	-	1060	2235	1140	2405	1260	2650	1440	3030	1585	3335	1815	3820	
	9	-	-	1290	2715	1390	2925	1530	3220	1750	3685	1930	4055	2210	4640	
	11	-	-	1375	2910	1480	3135	1630	3450	1865	3945	2050	4345	2350	4975	
	15	-	-	1530	3230	1650	3480	1815	3830	2075	4380	2285	4825	2620	5520	
	21	-	-	1710	3610	1845	3885	2030	4280	2325	4895	2560	5390	2930	6170	
	33	-	-	1990	4200	2145	4525	2360	4980	2705	5700	2975	6270	3405	7180	
	45	-	-	2210	4655	2380	5015	2620	5520	3000	6315	3300	6955	3780	7960	
81	-	-	2685	5665	2895	6105	3185	6720	3645	7690	4015	8465	4500	9400		

*1: Radial load is the value applied to the middle of the output shaft (at axial load).

*2: Axial load is the value applied to the center of the output shaft (at radial load).

Multiply radial load locating factor to the value in the above table when the radial load is applied to locations other than the middle of the output shaft.

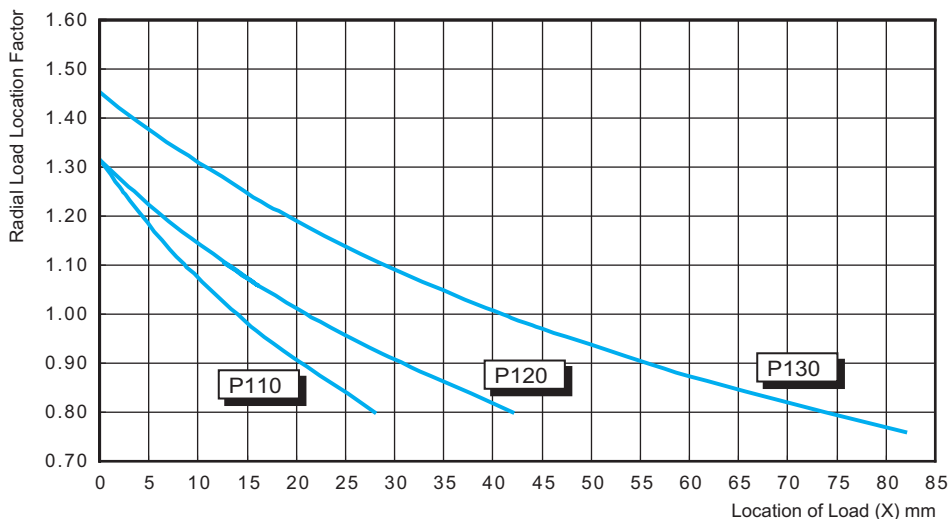


Fig. 2 Radial Load Location Factor

Selection Table 3 (Allowable External Rating)

Table 2-2 External Load (SI Engineering)

Motor Speed r/min		6000		5000		4000		3000		2000		1500		1000		Allowable Momen kgfm
Frame Size	Reduction Ratio	Radial Load *1	Axial Load *2	Radial Load *1	Axial Load *2	Radial Load *1	Axial Load *2	Radial Load *1	Axial Load *2	Radial Load *1	Axial Load *2	Radial Load *1	Axial Load *2	Radial Load *1	Axial Load *2	
		kgf	kgf	kgf	kgf	kgf	kgf	kgf	kgf	kgf	kgf	kgf	kgf	kgf	kgf	
P110	3.7(3/11)	21.9	43.3	23.4	45.9	25.5	49.4	28.0	54.5	32.1	62.2	35.2	68.3	40.3	78.5	7.13
	5	24.5	47.9	26.0	51.0	28.0	55.0	31.1	60.7	35.7	69.3	39.2	76.5	44.9	87.7	
	9	30.1	58.6	32.1	62.2	34.1	66.8	37.7	73.9	43.3	84.6	47.9	92.8	54.5	106.5	
	11	31.6	62.7	33.6	66.3	36.2	71.4	40.3	79.0	45.9	90.2	50.5	99.4	58.1	113.7	
	15	35.7	69.3	37.7	73.9	40.8	79.5	44.9	87.7	51.5	100.4	56.6	110.1	64.7	126.4	
	21	39.8	77.5	42.3	82.6	45.9	88.7	50.5	97.9	57.6	112.1	63.2	123.3	72.9	141.2	
	33	46.4	90.2	49.4	95.8	53.0	103.5	58.6	113.7	66.8	130.5	73.9	143.2	84.6	164.1	
	45	51.5	100.4	54.5	106.5	59.1	114.7	64.7	126.4	74.4	144.8	82.1	159.0	93.8	182.0	
81	62.7	121.3	66.8	129.0	71.9	138.6	79.0	152.9	90.7	174.8	99.9	192.2	107.0	220.2		
P120	3.7(3/11)	68.3	126.9	72.4	134.6	78.0	145.3	86.1	160.0	98.4	183.0	108.6	201.3	123.9	230.4	30.6
	5	75.9	141.2	80.5	150.4	87.2	162.1	95.8	178.4	109.6	203.9	120.8	224.8	138.1	257.4	
	9	92.3	172.3	98.4	183.0	106.0	197.2	116.7	217.1	133.5	248.2	146.8	273.2	168.2	312.9	
	11	98.4	183.5	104.5	195.2	112.6	210.0	124.4	231.4	142.2	264.5	156.5	291.5	179.4	333.3	
	15	109.6	203.9	116.7	217.1	125.4	233.9	138.1	257.4	158.0	294.6	174.3	324.2	199.3	371.0	
	21	122.8	228.3	130.5	242.6	140.7	261.5	154.4	288.0	176.9	329.8	194.7	362.9	223.2	415.4	
	33	142.7	265.5	151.4	282.4	163.1	304.3	179.9	334.9	205.9	383.3	226.8	422.0	259.4	482.7	
	45	158.0	294.6	168.2	312.9	180.9	336.9	199.3	371.0	228.3	425.1	251.3	467.4	288.0	489.3	
81	192.7	358.3	204.4	380.7	220.7	410.3	242.6	451.6	277.8	489.3	295.6	489.3	295.6	489.3		
P130	3.7(3/11)	-	-	97.3	205.4	105.0	221.2	115.7	243.6	132.0	278.8	145.8	306.8	166.7	351.2	63.2
	5	-	-	108.1	227.8	116.2	245.2	128.4	270.1	146.8	308.9	161.6	340.0	185.0	389.4	
	9	-	-	131.5	276.8	141.7	298.2	156.0	328.2	178.4	375.6	196.7	413.4	225.3	473.0	
	11	-	-	140.2	296.6	150.9	319.6	166.2	351.7	190.1	402.1	209.0	442.9	239.6	507.1	
	15	-	-	156.0	329.3	168.2	354.7	185.0	390.4	211.5	446.5	232.9	491.8	267.1	562.7	
	21	-	-	174.3	368.0	188.1	396.0	206.9	436.3	237.0	499.0	261.0	549.4	298.7	629.0	
	33	-	-	202.9	428.1	218.7	461.3	240.6	507.6	275.7	581.0	303.3	639.1	347.1	731.9	
	45	-	-	225.3	474.5	242.6	511.2	267.1	562.7	305.8	643.7	336.4	709.0	385.3	811.4	
81	-	-	273.7	577.5	295.1	622.3	324.7	685.0	371.6	783.9	409.3	862.9	458.7	958.2		

P1 Type


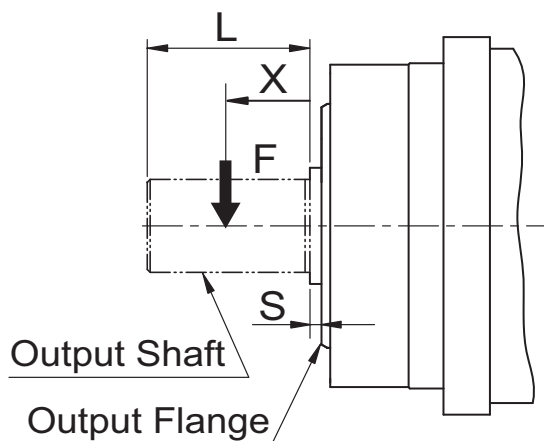


Fig. 3


Selection Procedure

Flow Chart and Formula of Selection

Fig. 4 Load Pattern

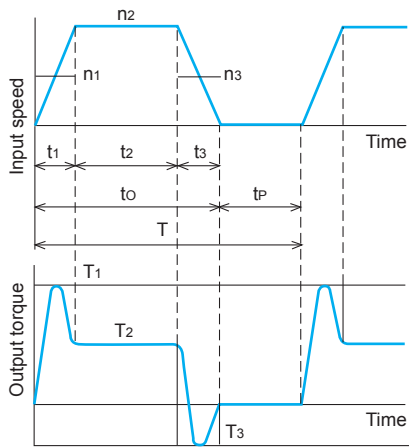


n_1 : Average input speed at acceleration when as in Fig 4: $n_1 = \frac{n_2}{2}$ [r/min]
 n_2 : Input speed at normal operation
 n_3 : Average input speed at deceleration when as in Fig 4: $n_1 = n_3 = \frac{n_2}{2}$ [r/min]
 t_1 : Acceleration time [s]
 t_2 : Steady operation time [s]
 t_3 : Deceleration time [s]
 t_o : Operation time [s]
 t_p : Stop time [s]
 T : Operation cycle [s]
 T_1 : Starting peak torque [Nm]
 T_2 : Steady operation torque [Nm]
 T_3 : Stopping peak torque [Nm]

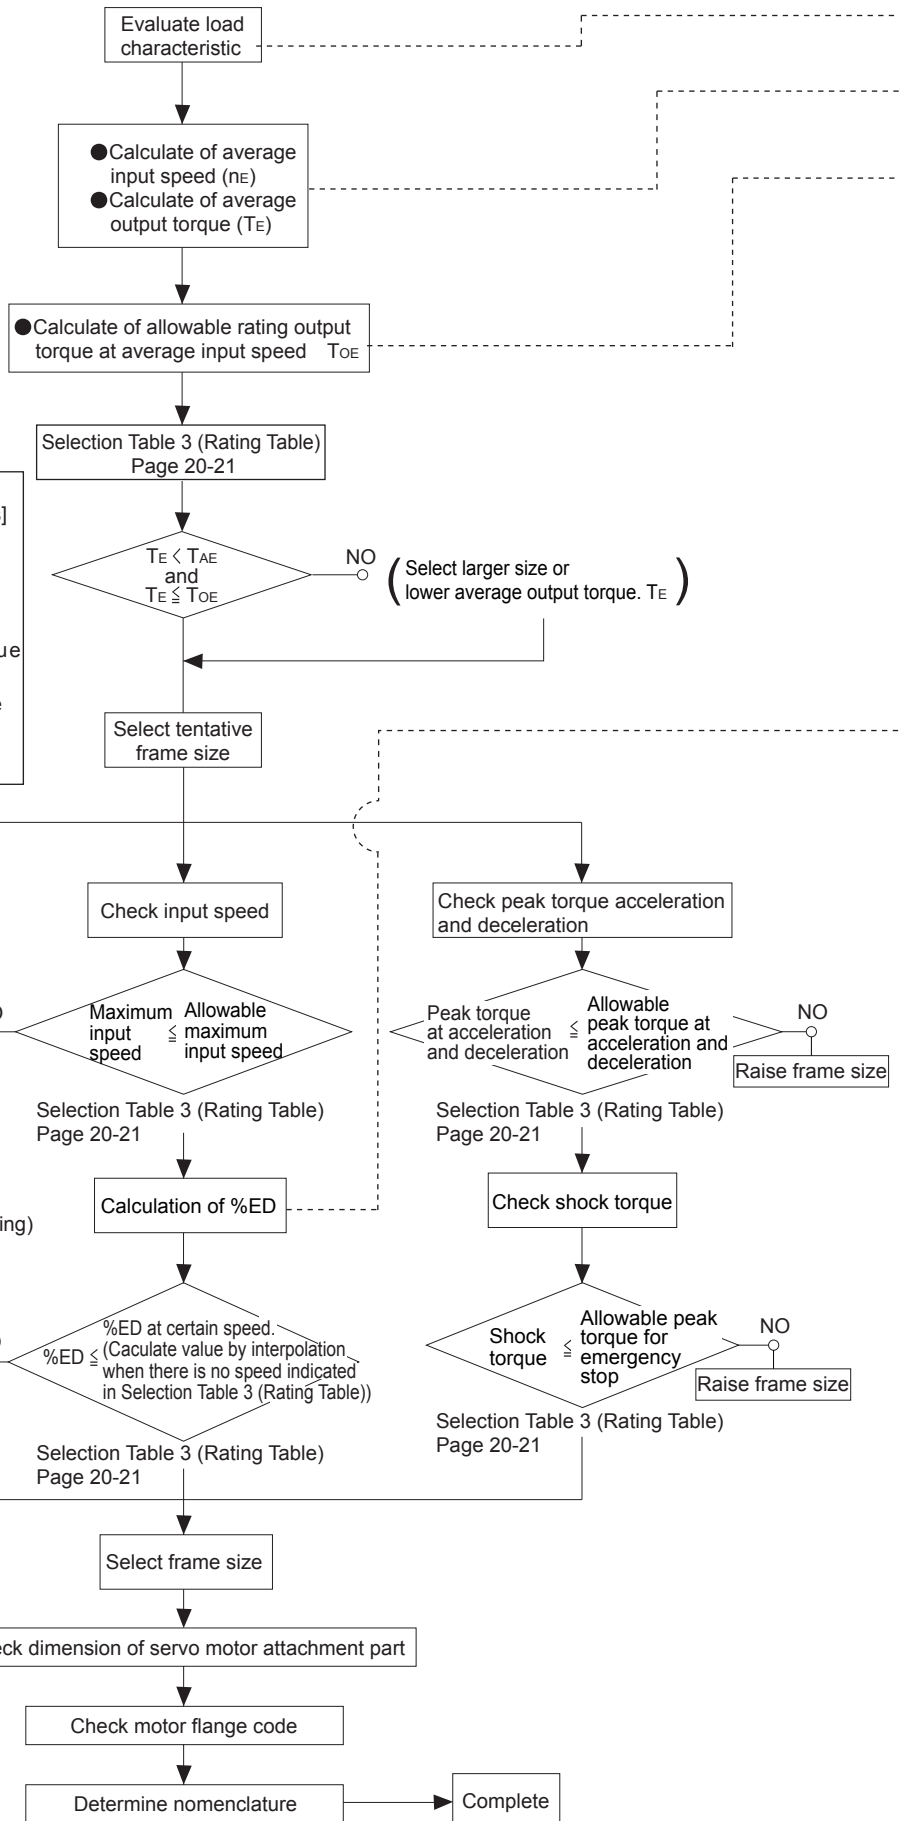


Dimension Drawings

Frame Size: P110
 Reduction Ratio: 1/3.7
 Solid Shaft

Output Shaft Keyless

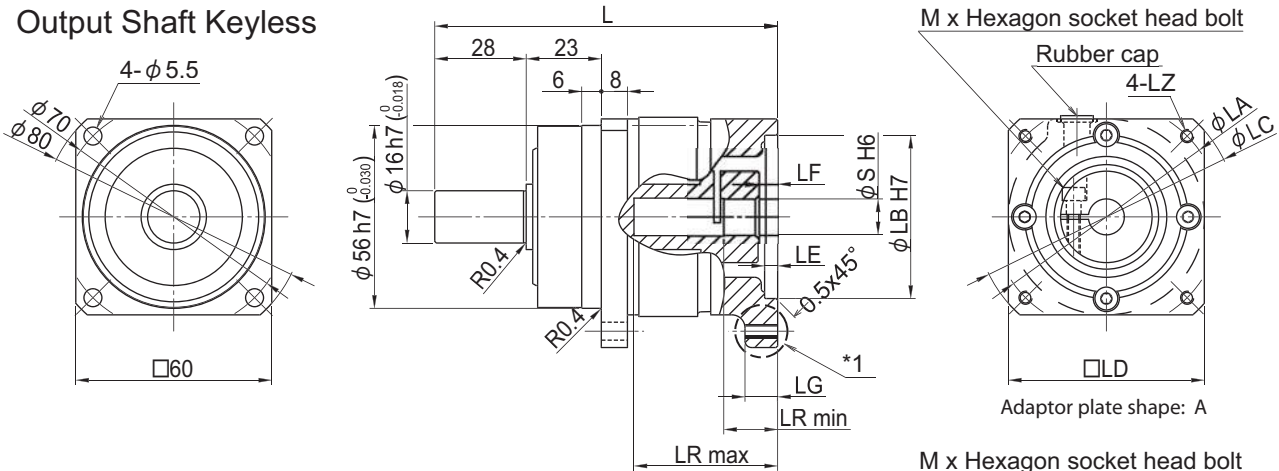

Output Shaft with Key

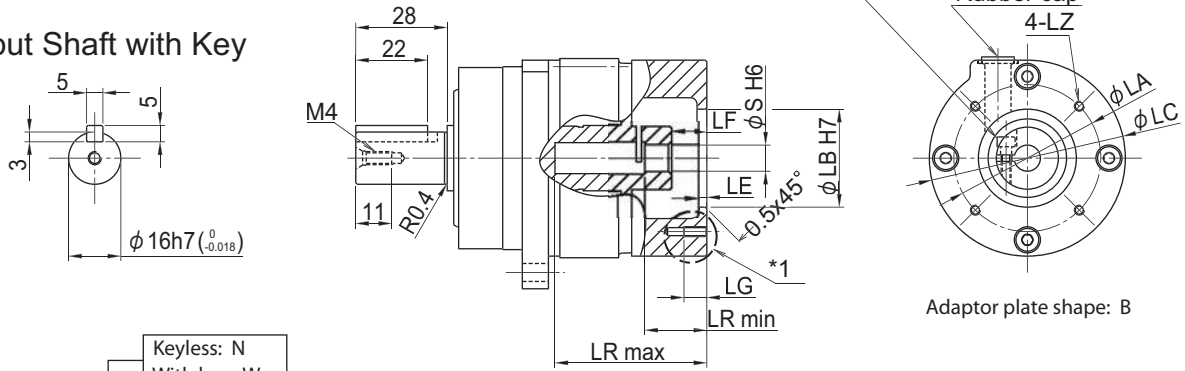

Nomenclature ANFX-P110

Keyless: N
 With key: W

Output shaft type Motor flange code Backlash Reduction ratio (3.7)

3 min: L3
 15 min: LD

Motor flange code	L	LA	LB	LC	LD	LE	LF	Dimension LG	*1	Adaptor plate shape	LZ	LR		S	M	Mass [kg]	Motor flange code		
												max	min						
2C	107.5	45	30	60	-	5	11	7	Useful thread length	B	M3	46.5	19	8	M3	0.9	2C		
7J		46	30	60	-	5	11	9	Useful thread length		M4	46.5	19	6	M3	0.9	7J		
2D		46	30	60	-	5	11	9	Useful thread length		M4	46.5	19	8	M3	0.9	2D		
2E	105	60	50	80	60	4	8.5	8	Useful thread length	A	M4	44	16.5	8	M3	0.9	2E		
2K		60	50	80	60	4	6	8	Useful thread length		M4	44	16.5	11	M4	0.9	2K		
2F		70	50	80	60	4	8.5	10	Through hole		M4	44	16.5	8	M3	0.9	2F		
2L		70	50	80	60	4	6	10	Through hole		M4	44	16.5	11	M4	0.9	2L		
2P		70	50	80	60	4	6	10	Through hole		M4	44	16.5	14	M4	0.9	2P		
2G		70	50	80	60	4	8.5	10	Through hole		M5	44	16.5	8	M3	0.9	2G		
2H		70	50	80	60	4	6	10	Through hole		M5	44	16.5	9	M4	0.9	2H		
2R		70	50	80	60	4	6	10	Through hole		M5	44	16.5	14	M4	0.9	2R		
8A		106.5	90	70	105	80	6	7.5	12		Through hole	A	M5	45.5	18	11	M4	1.0	8A
8B			90	70	105	80	6	7.5	12		Through hole		M5	45.5	18	14	M4	1.0	8B
2T	90		70	105	80	6	7.5	12	Through hole	M6	45.5		18	14	M4	1.0	2T		
2J	112	100	80	120	90	5	13	12	Through hole	M6	51	23.5	10	M4	1.1	2J			
8E	128.5	100	80	120	90	6	9.5	12	Through hole	M6	41	22	16	M5	1.3	8E			


Note 1: Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."
 Note 2: Dimensions and mass shown in the above figures are subject to change without prior notification.

Dimension Drawings


P1 Type

Frame Size: P110
Reduction Ratio: 1/11
Solid Shaft

Output Shaft Keyless

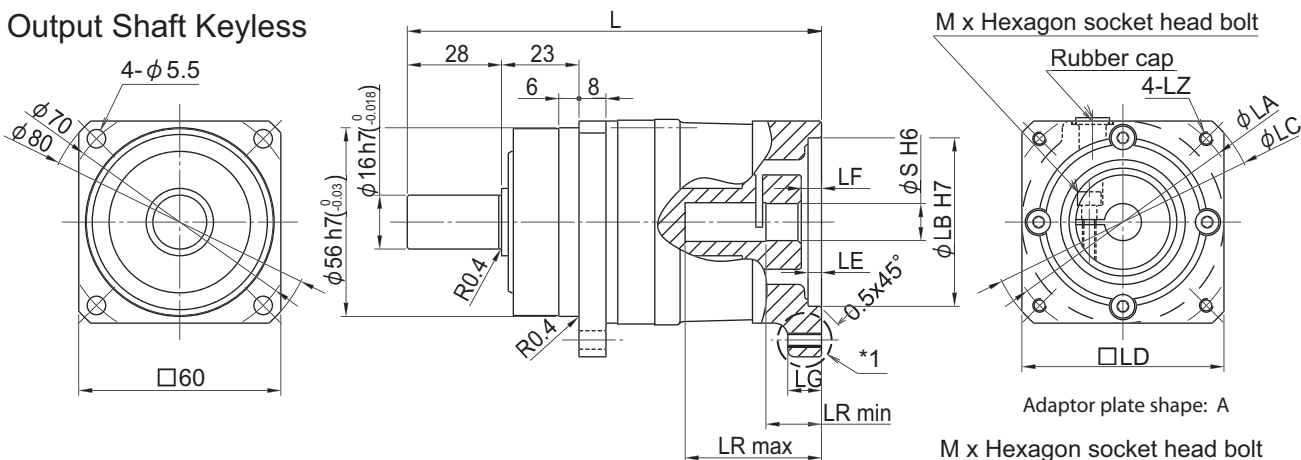

Output Shaft with Key

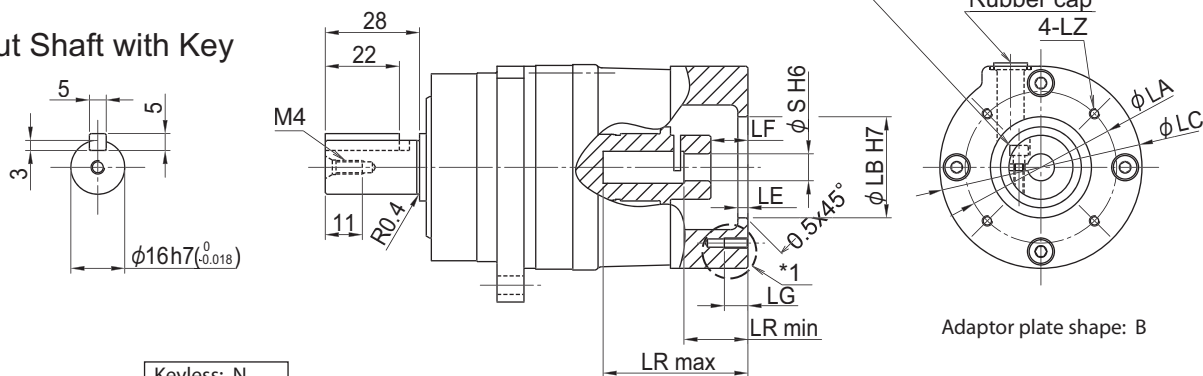

Nomenclature ANFX-P110

Keyless: N
With key: W

Output shaft type Motor flange code Backlash Reduction ratio (11)

3 min: L3
15 min: LD


Motor flange code	Dimension										Adaptor plate shape	LZ	LR		S	M	Mass [kg]	Motor flange code
	L	LA	LB	LC	LD	LE	LF	LG	*1	Shape			max	min				
2C	125.5	45	30	60	-	5	11	7	Useful thread length	B	M3	43	19	8	M3	1.1	2C	
7J		46	30	60	-	5	11	9	Useful thread length		M4	43	19	6	M3	1.1	7J	
2D		46	30	60	-	5	11	9	Useful thread length		M4	43	19	8	M3	1.1	2D	
2E	123	60	50	80	60	4	8.5	9	Useful thread length	A	M4	40.5	16.5	8	M3	1.1	2E	
2K		60	50	80	60	4	6	9	Useful thread length		M4	40.5	16.5	11	M4	1.2	2K	
2F		70	50	80	60	4	8.5	10	Through hole		M4	40.5	16.5	8	M3	1.1	2F	
2L		70	50	80	60	4	6	10	Through hole		M4	40.5	16.5	11	M4	1.2	2L	
2G		70	50	80	60	4	8.5	10	Through hole		M5	40.5	16.5	8	M3	1.1	2G	
2H		70	50	80	60	4	6	10	Through hole		M5	40.5	16.5	9	M4	1.2	2H	
2R		70	50	80	60	4	6	10	Through hole		M5	40.5	16.5	14	M4	1.2	2R	
8A		124.5	90	70	105	80	6	7.5	12		Through hole	M5	42	18	11	M4	1.3	8A
8B	90		70	105	80	6	7.5	12	Through hole	M5	42	18	14	M4	1.3	8B		
2T	90		70	105	80	6	7.5	12	Through hole	M6	42	18	14	M4	1.3	2T		

Note 1: Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."
2: Dimensions and mass shown in the above figures are subject to change without prior notification.


Dimension Drawings

Frame Size: P110
 Reduction Ratio: 1/15
 Solid Shaft

Output Shaft Keyless

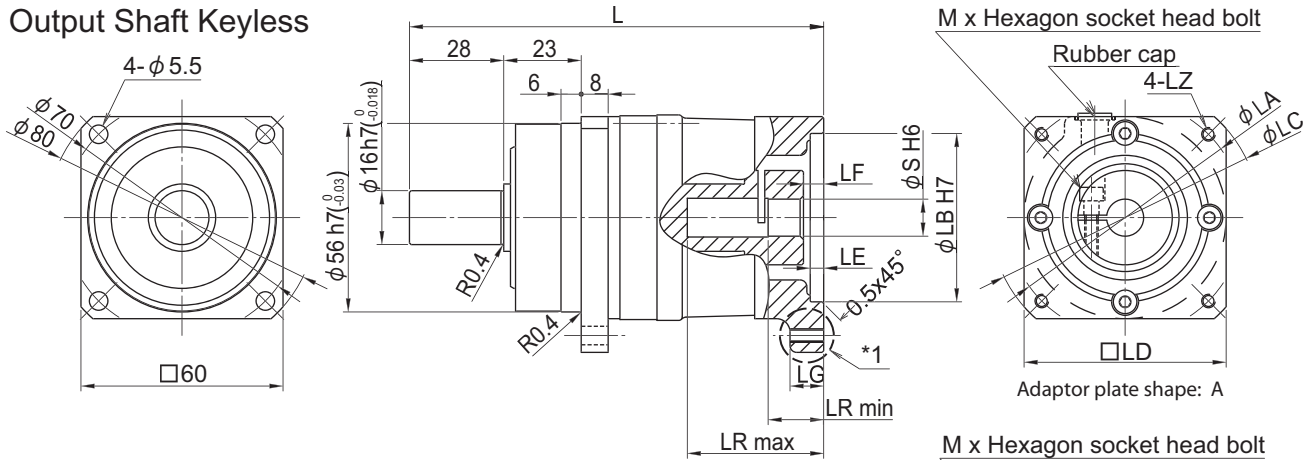

Output Shaft with Key

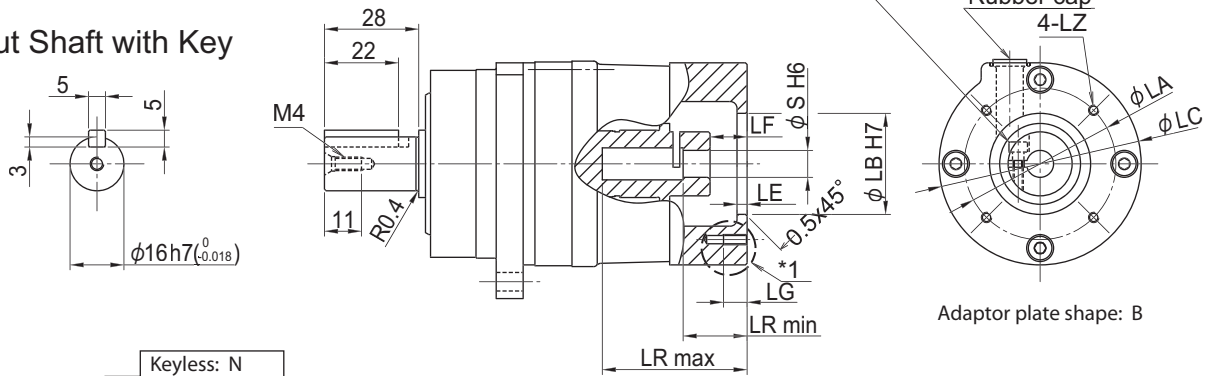

Nomenclature ANFX-P110

Keyless: N
 With key: W

Output shaft type Motor flange code Backlash Reduction ratio (15)

3 min: L3
 15 min: LD

Motor flange code	Dimension										Adaptor plate shape	LZ	LR		S	M	Mass [kg]	Motor flange code
	L	LA	LB	LC	LD	LE	LF	LG	*1	Shape			max	min				
2C	125.5	45	30	60	-	5	11	7	Useful thread length	B	M3	43	19	8	M3	1.1	2C	
7J		46	30	60	-	5	11	9	Useful thread length		M4	43	19	6	M3	1.1	7J	
2D		46	30	60	-	5	11	9	Useful thread length		M4	43	19	8	M3	1.1	2D	
2E	123	60	50	80	60	4	8.5	9	Useful thread length	A	M4	40.5	16.5	8	M3	1.1	2E	
2K		60	50	80	60	4	6	9	Useful thread length		M4	40.5	16.5	11	M4	1.2	2K	
2F		70	50	80	60	4	8.5	10	Through hole		M4	40.5	16.5	8	M3	1.1	2F	
2L		70	50	80	60	4	6	10	Through hole		M4	40.5	16.5	11	M4	1.2	2L	
2G		70	50	80	60	4	8.5	10	Through hole		M5	40.5	16.5	8	M3	1.1	2G	
2H		70	50	80	60	4	6	10	Through hole		M5	40.5	16.5	9	M4	1.2	2H	
2R		70	50	80	60	4	6	10	Through hole		M5	40.5	16.5	14	M4	1.2	2R	
8A		90	70	105	80	6	7.5	12	Through hole		M5	42	18	11	M4	1.3	8A	
8B	124.5	90	70	105	80	6	7.5	12	Through hole	A	M5	42	18	14	M4	1.3	8B	
2T		90	70	105	80	6	7.5	12	Through hole		M6	42	18	14	M4	1.3	2T	


Note 1: Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."
 Note 2: Dimensions and mass shown in the above figures are subject to change without prior notification.

Dimension Drawings


P1 Type

Frame Size: P110
Reduction Ratio: 1/21
Solid Shaft

Output Shaft Keyless

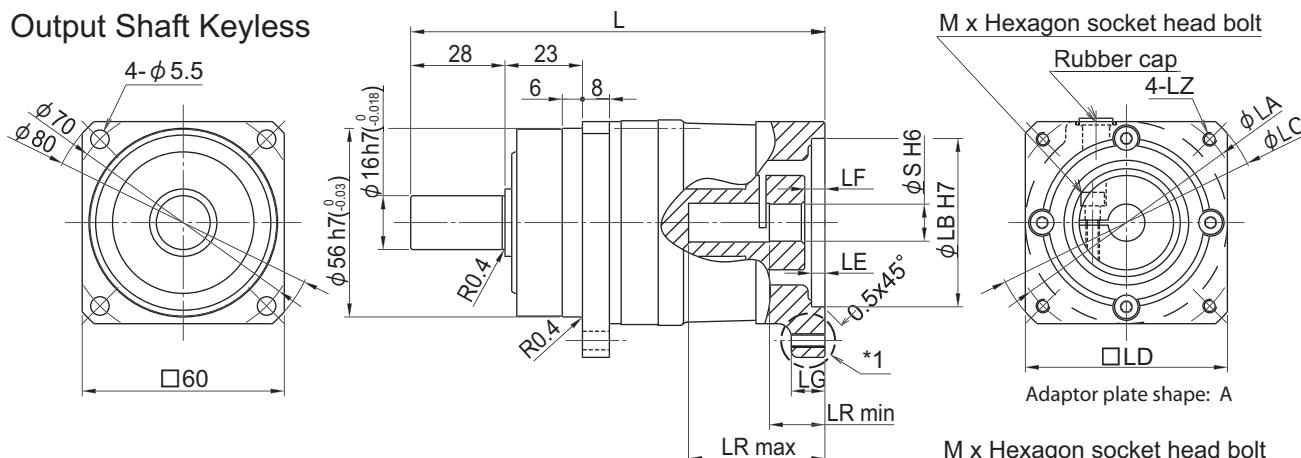

Output Shaft with Key

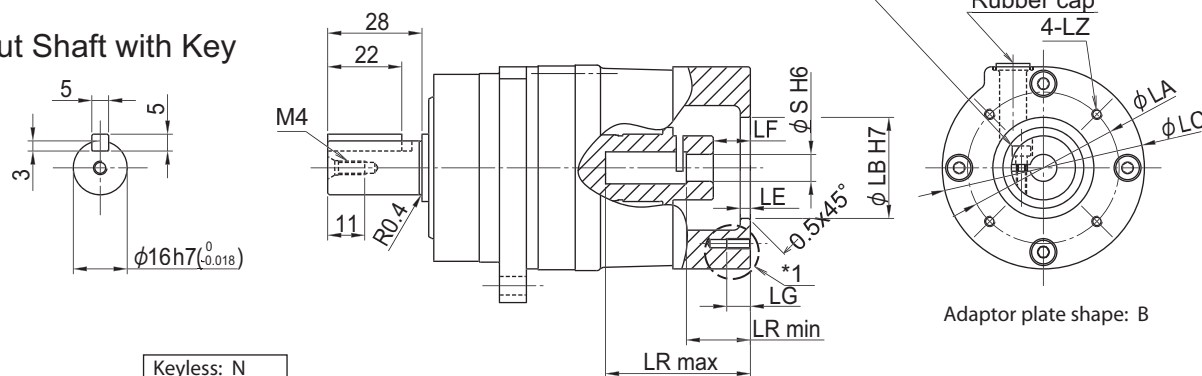

Nomenclature ANFX-P110

Keyless: N
With key: W

Output shaft type Motor flange code Backlash Reduction ratio (21)

3 min: L3
15 min: LD

Motor flange code	L	LA	LB	LC	LD	LE	LF	Dimension LG	*1	Adaptor plate shape	LZ	LR		S	M	Mass [kg]	Motor flange code
												max	min				
2C	125.5	45	30	60	-	5	11	7	Useful thread length	B	M3	43	19	8	M3	1.1	2C
7J		46	30	60	-	5	11	9	Useful thread length		M4	43	19	6	M3	1.1	7J
2D		46	30	60	-	5	11	9	Useful thread length		M4	43	19	8	M3	1.1	2D
2E	123	60	50	80	60	4	8.5	9	Useful thread length	A	M4	40.5	16.5	8	M3	1.1	2E
2K		60	50	80	60	4	6	9	Useful thread length		M4	40.5	16.5	11	M4	1.2	2K
2F		70	50	80	60	4	8.5	10	Through hole		M4	40.5	16.5	8	M3	1.1	2F
2L		70	50	80	60	4	6	10	Through hole		M4	40.5	16.5	11	M4	1.1	2L
2G		70	50	80	60	4	8.5	10	Through hole		M5	40.5	16.5	8	M3	1.1	2G
2H		70	50	80	60	4	6	10	Through hole		M5	40.5	16.5	9	M4	1.2	2H
2R		70	50	80	60	4	6	10	Through hole		M5	40.5	16.5	14	M4	1.1	2R
8A		124.5	90	70	105	80	6	7.5	12		Through hole	M5	42	18	11	M4	1.3
8B	90		70	105	80	6	7.5	12	Through hole	M5	42	18	14	M4	1.2	8B	
2T	90		70	105	80	6	7.5	12	Through hole	M6	42	18	14	M4	1.2	2T	


Note 1: Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Note 2: Dimensions and mass shown in the above figures are subject to change without prior notification.


Dimension Drawings

Frame Size: P110
 Reduction Ratio: 1/33
 Solid Shaft

Output Shaft Keyless

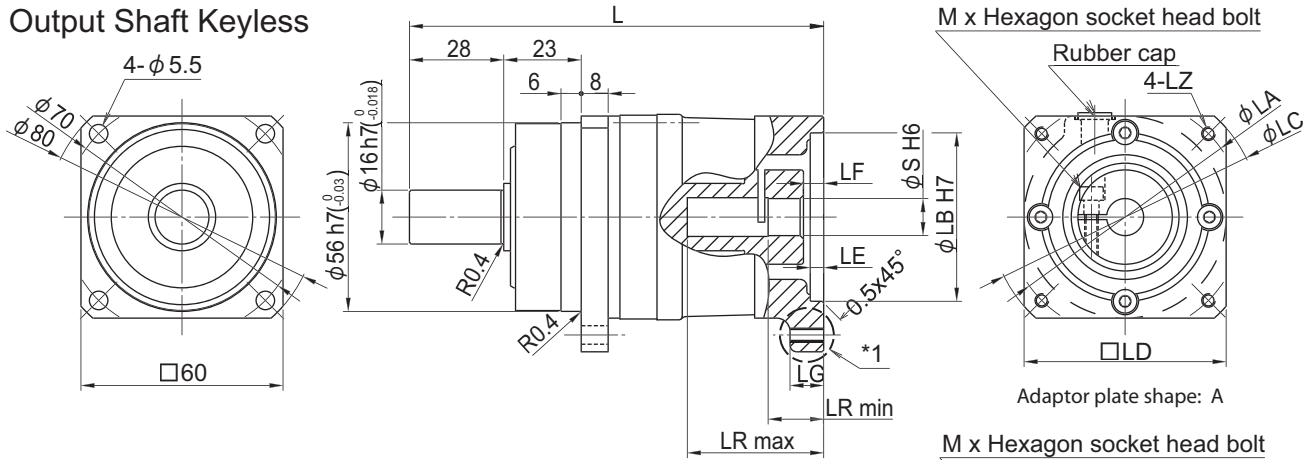

Output Shaft with Key

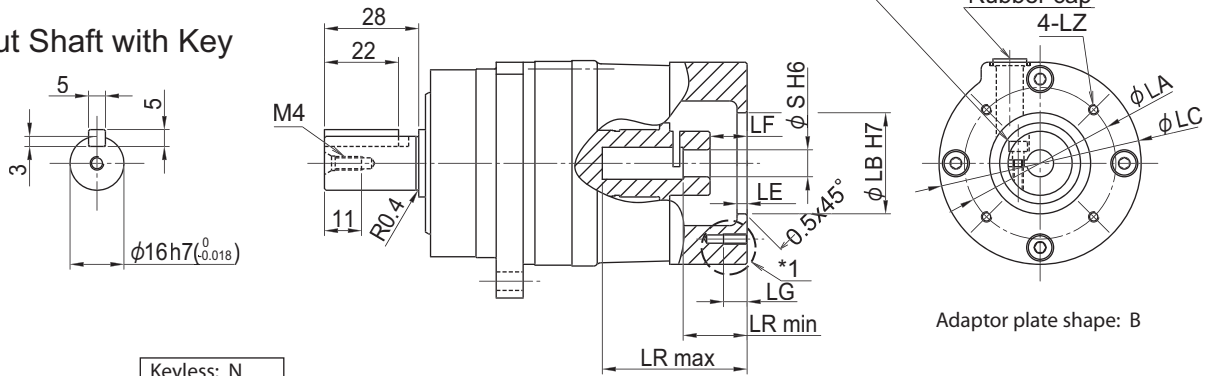

Nomenclature ANFX-P110

Keyless: N
 With key: W

Output shaft type Motor flange code Backlash Reduction ratio (33)

3 min: L3
 15 min: LD

Motor flange code	L	LA	LB	LC	LD	LE	LF	LG	*1 Shape	Adaptor plate shape	LZ	LR		S	M	Mass [kg]	Motor flange code
												max	min				
2C	125.5	45	30	60	-	5	11	7	Useful thread length	B	M3	43	19	8	M3	1.2	2C
7J		46	30	60	-	5	11	9	Useful thread length		M4	43	19	6	M3	1.2	7J
2D		46	30	60	-	5	11	9	Useful thread length		M4	43	19	8	M3	1.2	2D
2E	123	60	50	80	60	4	8.5	9	Useful thread length	A	M4	40.5	16.5	8	M3	1.1	2E
2K		60	50	80	60	4	6	9	Useful thread length		M4	40.5	16.5	11	M4	1.3	2K
2F		70	50	80	60	4	8.5	10	Through hole		M4	40.5	16.5	8	M3	1.1	2F
2L		70	50	80	60	4	6	10	Through hole		M4	40.5	16.5	11	M4	1.2	2L
2G		70	50	80	60	4	8.5	10	Through hole		M5	40.5	16.5	8	M3	1.1	2G
2H		70	50	80	60	4	6	10	Through hole		M5	40.5	16.5	9	M4	1.2	2H
2R		70	50	80	60	4	6	10	Through hole		M5	40.5	16.5	14	M4	1.1	2R
8A	124.5	90	70	105	80	6	7.5	12	Through hole	A	M5	42	18	11	M4	1.4	8A
2T		90	70	105	80	6	7.5	12	Through hole		M6	42	18	14	M4	1.2	2T


Note 1: Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."
 Note 2: Dimensions and mass shown in the above figures are subject to change without prior notification.

Dimension Drawings


P1 Type

Frame Size: P110
Reduction Ratio: 1/45
Solid Shaft

Output Shaft Keyless

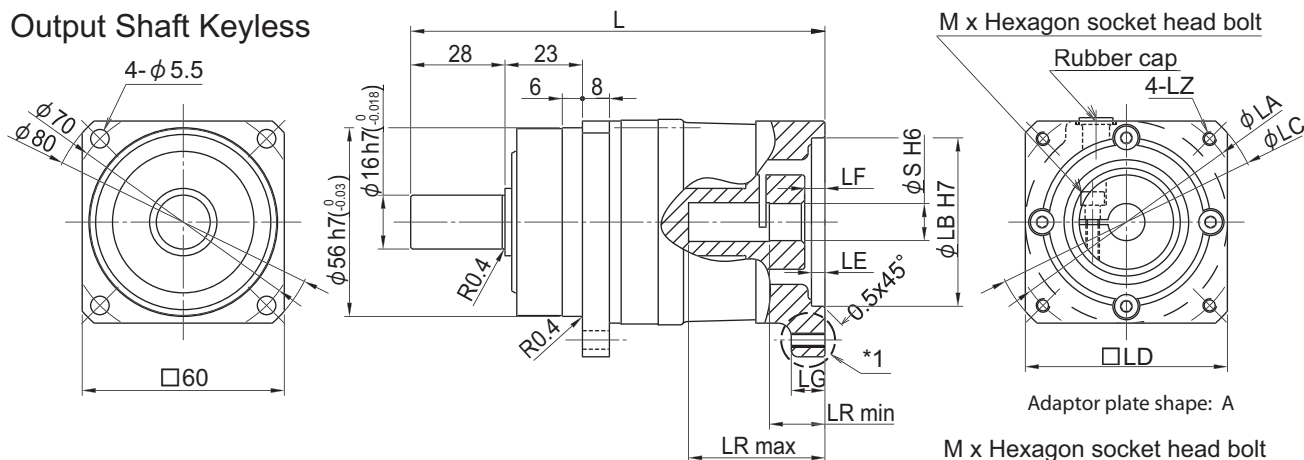

Output Shaft with Key

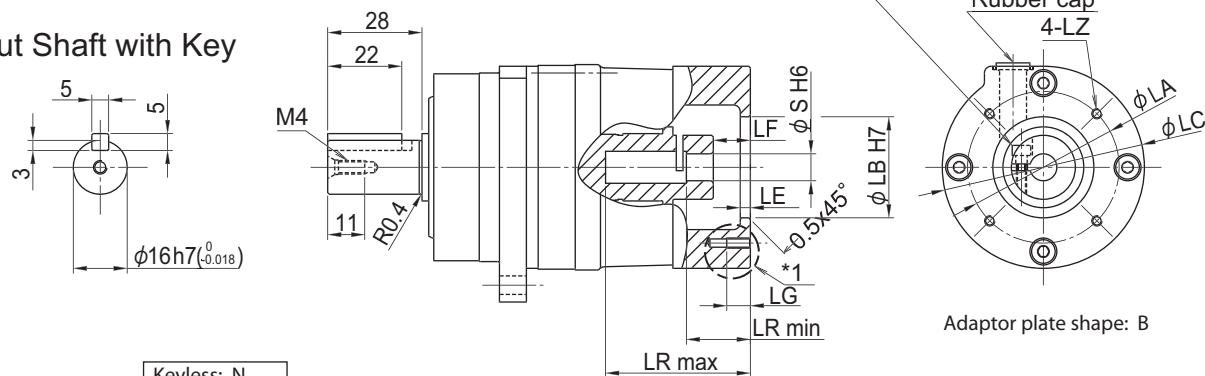

Nomenclature ANFX-P110

Keyless: N
With key: W

Output shaft type Motor flange code Backlash Reduction ratio (45)

3 min: L3
15 min: LD

Motor flange code	Dimension										Adaptor plate shape	LZ	LR		S	M	Mass [kg]	Motor flange code
	L	LA	LB	LC	LD	LE	LF	LG	*1	Shape			max	min				
2C	125.5	45	30	60	-	5	11	7	Useful thread length	B	M3	43	19	8	M3	1.2	2C	
7J		46	30	60	-	5	11	9	Useful thread length		M4	43	19	6	M3	1.2	7J	
2D		46	30	60	-	5	11	9	Useful thread length		M4	43	19	8	M3	1.2	2D	
2E	123	60	50	80	60	4	8.5	9	Useful thread length	A	M4	40.5	16.5	8	M3	1.1	2E	
2F		70	50	80	60	4	8.5	10	Through hole		M4	40.5	16.5	8	M3	1.1	2F	
2G		70	50	80	60	4	8.5	10	Through hole		M5	40.5	16.5	8	M3	1.1	2G	
2H		70	50	80	60	4	6	10	Through hole		M5	40.5	16.5	9	M4	1.2	2H	


Note 1: Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Note 2: Dimensions and mass shown in the above figures are subject to change without prior notification.


Dimension Drawings

Frame Size: P110
 Reduction Ratio: 1/81
 Solid Shaft

Output Shaft Keyless

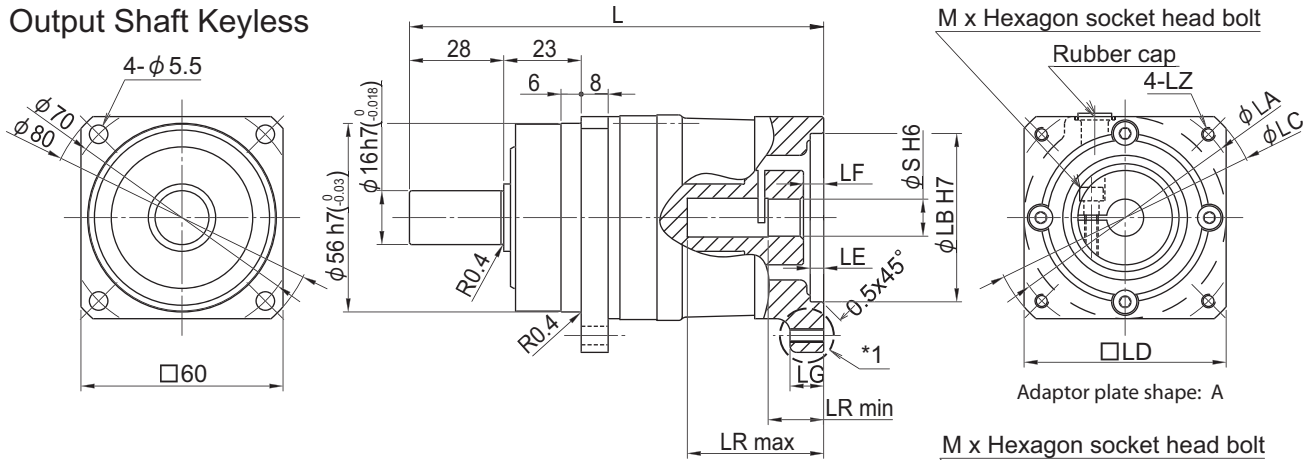

Output Shaft with Key

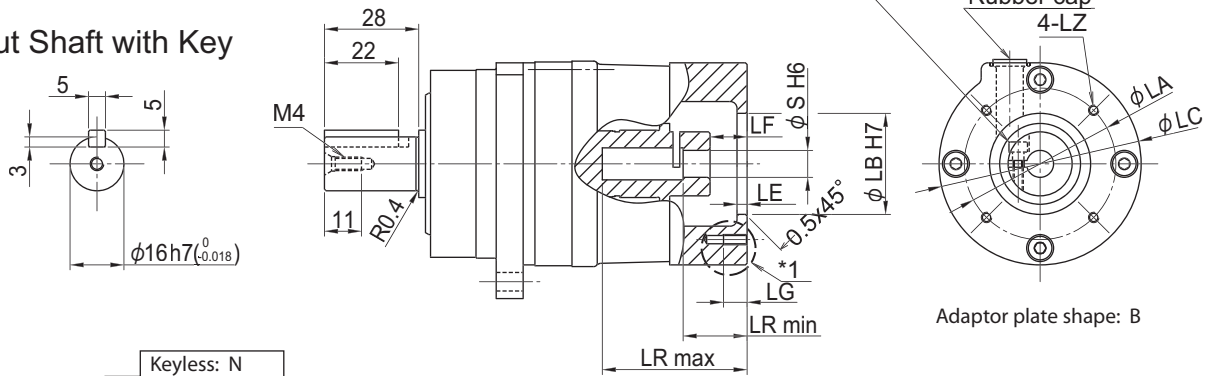

Nomenclature ANFX-P110

Keyless: N
 With key: W

Output shaft type Motor flange code Backlash Reduction ratio (81)

3 min: L3
 15 min: LD


Motor flange code	L	LA	LB	LC	LD	LE	LF	Dimension LG	*1	Adaptor plate shape	LZ	LR		S	M	Mass [kg]	Motor flange code
												max	min				
2C	125.5	45	30	60	-	5	11	7	Useful thread length	B	M3	43	19	8	M3	1.1	2C
7J		46	30	60	-	5	11	9	Useful thread length		M4	43	19	6	M3	1.1	7J
2D		46	30	60	-	5	11	9	Useful thread length		M4	43	19	8	M3	1.1	2D
2E	123	60	50	80	60	4	8.5	9	Useful thread length	A	M4	40.5	16.5	8	M3	1.2	2E
2H		70	50	80	60	4	6	10	Through hole		M5	40.5	16.5	9	M4	1.2	2H

Note 1: Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."
 Note 2: Dimensions and mass shown in the above figures are subject to change without prior notification.



Dimension Drawings

Frame Size: P120
 Reduction Ratio: 1/3.7
 Solid Shaft

Output Shaft Keyless

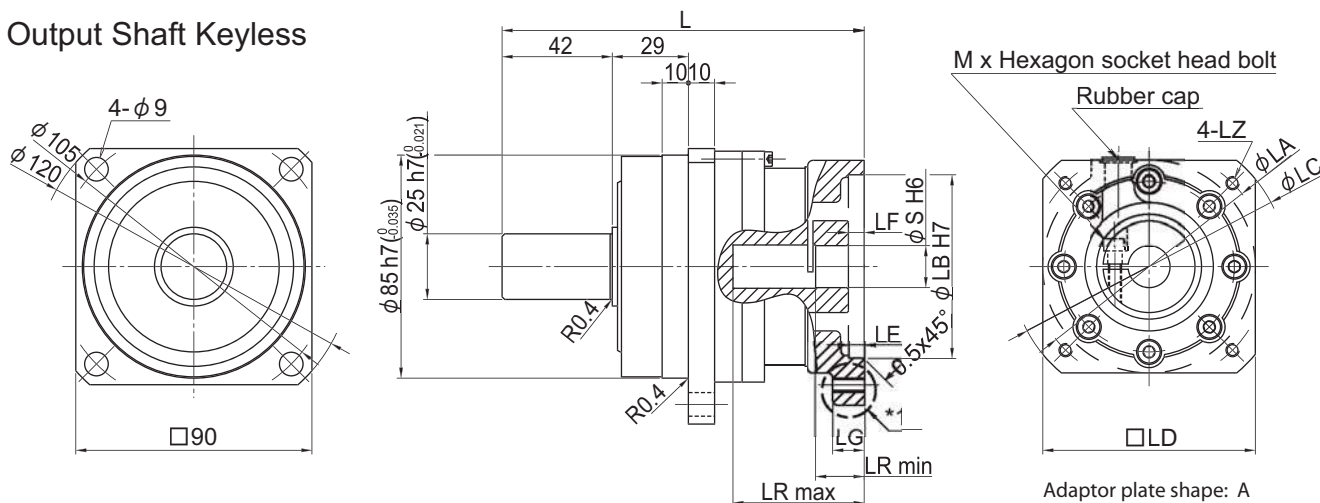

Output Shaft with Key

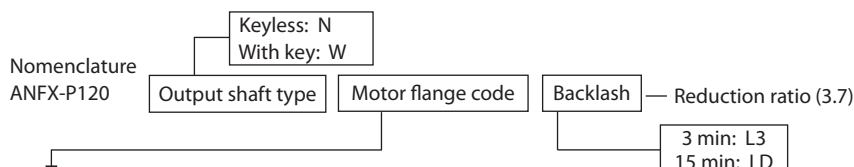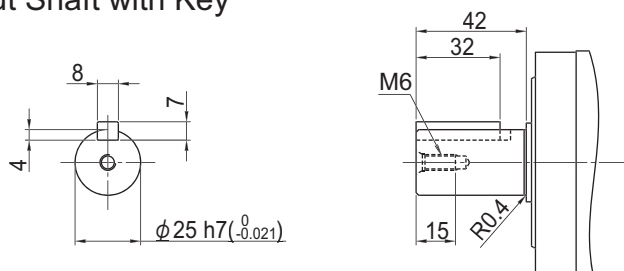

Motor flange code	L	LA	LB	LC	LD	LE	LF	Dimension LG	*1 Adaptor plate shape	LZ	LR		S	M	Mass [kg]	Motor flange code
											max	min				
0U	138	90	70	105	81	6	6	12	Through hole	M5	50	18.5	16	M5	2.5	0U
7S		90	70	105	81	6	6	12	Through hole	M5	50	18.5	19	M5	2.4	7S
7P		90	70	105	81	6	6	12	Through hole	M6	50	18.5	16	M5	2.5	7P
1G		90	70	105	81	6	6	12	Through hole	M6	50	18.5	19	M5	2.4	1G
0V	151.5	100	80	120	90	5	21.5	12	Through hole	M6	63.5	32	14	M4	2.6	0V
8E		100	80	120	90	5	19.5	12	Through hole	M6	63.5	32	16	M5	2.6	8E
7V		100	80	120	90	5	19.5	12	Through hole	M6	63.5	32	19	M5	2.5	7V
1L	164.5	115	95	135	100	6	17	16	Through hole	M6	46	31.5	24	M6	2.9	1L
7A	151.5	115	95	135	100	6	19.5	16	Through hole	M8	63.5	32	16	M5	2.7	7A
7B		115	95	135	100	6	19.5	16	Through hole	M8	63.5	32	19	M5	2.6	7B
0W	164.5	115	95	135	100	6	17	16	Through hole	M8	46	31.5	22	M6	3.0	0W
7Y		115	95	135	100	6	17	16	Through hole	M8	46	31.5	24	M6	2.9	7Y
0Y		135	110	165	120	7	17	16	Through hole	M8	46	31.5	22	M6	3.1	0Y
7R	154.5	145	110	165	120	7	22.5	16	Through hole	M8	66.5	35	16	M5	2.8	7R
7X		145	110	165	120	7	22.5	16	Through hole	M8	66.5	35	19	M5	2.7	7X
1S	189.5	145	110	165	120	7	42	16	Through hole	M8	71	55	22	M6	3.2	1S
7Z		145	110	165	120	7	42	16	Through hole	M8	71	55	24	M6	3.2	7Z

Note 1: Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Note 2: Dimensions and mass shown in the above figures are subject to change without prior notification.

P1 Type